


Product Specifications

Product Family	Zybrnet 10G
Category	Cat.6A
Product	Cat. 6A Shielded "Single-motion" Keystone
Item no.	ZN62323269
Edition	1.0







Approvals

IEC 11801 - 2 ANSI/TIA-568-C.2 IEC 60603-7-51

Applications & Features

- ✓ Single motion tool compatible
- ✓ Dust cap
- ✓ Cat. 6A/7A

Product drawings

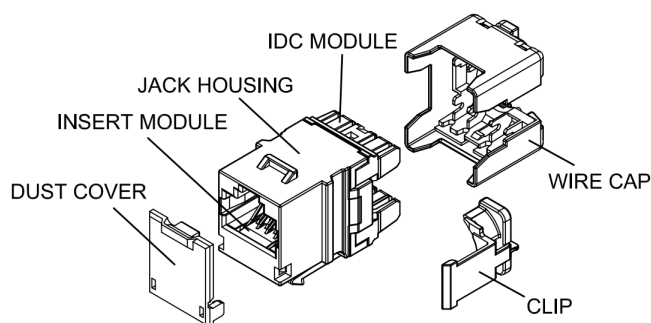

Physical properties

Materials

Housing
Spring wire

IDC Module

Zinc-alloy fully shielded
Phosphor Bronze alloy plated with 50
micro-inch Gold
Phosphor Bronze alloy with 100
micro-inch 100% Tin alloy

Electrical & mechanical properties

Electrical

Di-electric withstanding voltage

1000 V d.c.
1 min @ 60 Hz a.c. contacts
500 MΩ min. @ 100V d.c

Insulation resistance

Mechanical

Insertion/ Extraction life
IDC wire gauge

750 Cycles Minimum
22~24 AWG

