

Product Specifications

Product Family	Zybrnet
Category	Cat.6A
Product	Keystone Jack, Toolless, Shielded Metal
Item no.	ZN62332269




Approvals

ANSI/TIA-568-C.2 Cat.6A


Applications & Features

- ✓ Toolless installation
- ✓ Fits Zybrnet patch panels
- ✓ Cat 6A high performance

Product Drawings

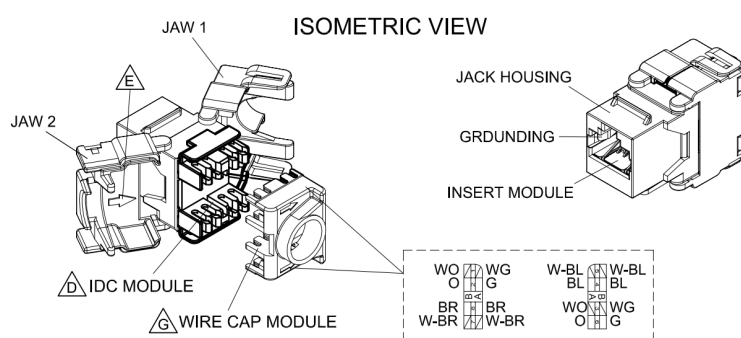

ASSEMBLY DIMENSION

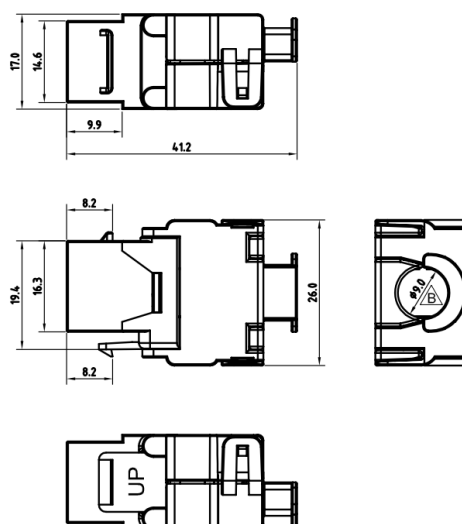

Physical properties

Materials

Housing
Spring Wire

IDC

Zinc-alloy fully shielded
Phosphor Bronze Alloy Plated With 50
micro-inch of Gold
Phosphor Bronze Alloy With 100
micro-inch 100% Sn Alloy

Electrical & mechanical properties

Electrical

Electrical Insulation Resistance
Dielectric Withstanding Voltage

500 MΩ min. @ 100V d.c
1000V or 1500V peak at 60Hz for 1 minu-
te with contacts connected to shield.



Mechanical

Insertion / Extraction Life
IDC Wire Gauge

750 Cycles Minimum
Re-usable IDC's can be terminated 20
times with wires from 26 AWG through
22 AWG.