


Data Sheet | Item Number: 2002-1411/1000-884

Component terminal block; 4-conductor; with 1K1 resistor; BF 0207; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

<https://www.wago.com/2002-1411/1000-884>

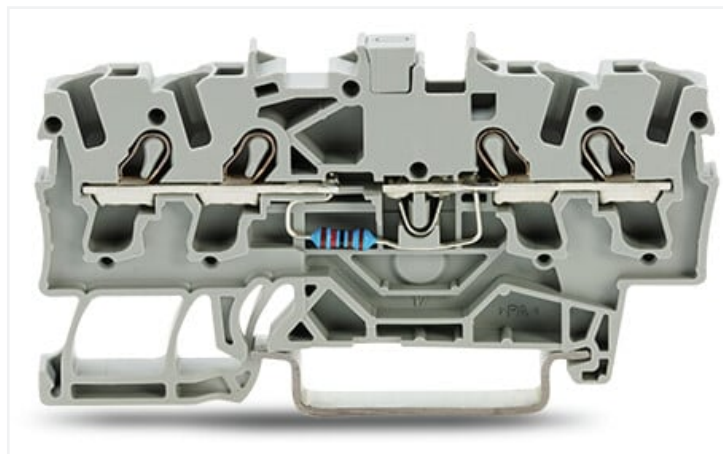

Color: ■ gray

Similar to illustration

Electrical data

Operating voltage	250 VAC
Load current per potential	24 A
Power (max.)	0.6 W
Thermal resistance	140 K/W
Tolerance	±1%
Resistor type/design	DIN 0207

Safety and protection

Rated surge voltage	4 kV
Pollution degree	3
Protection type	IP20

Connection data

Connection points	4
Total number of potentials	1
Number of levels	1
Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.25 ... 4 mm ² / 22 ... 12 AWG
Fine-stranded conductor	0.25 ... 4 mm ² / 22 ... 12 AWG
Strip length	10 ... 12 mm / 0.39 ... 0.47 inches



Physical data	
Width	5.2 mm / 0.205 inches
Height	69.9 mm / 2.752 inches
Depth from upper-edge of DIN-rail	32.9 mm / 1.295 inches

Material data	
Color	gray
Insulation material	Polyamide (PA66)
Material group	I
Flammability class per UL94	V0
Fire load	0.16 MJ
Weight	7.6 g

Environmental requirements	
Ambient temperature (operation)	-25 ... +70 °C
Processing temperature	-35 ... +85 °C

Standards and specifications	
Standards/specifications	EN 60947-7-1 EN 60664-1 EN 60536

Commercial data	
PU (SPU)	100 pcs
Country of origin	DE
GTIN	4055143655767
Customs tariff number	85369010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
2002-1411/1000-884

↓