

# Concord

Solstice 200 1600lm 940 SSC BB  
2070393



## Features

- The Solstice 200 1600lm 940 SSC BB is a high efficient SSC BB dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 200mm.

## Product Overview


|                                 |                                |
|---------------------------------|--------------------------------|
| Product name                    | Solstice 200 1600lm 940 SSC BB |
| Technology                      | LED                            |
| Cap/Base                        | N/A                            |
| Housing                         | Aluminium                      |
| Mount                           | Ceiling recessed mounting      |
| E-number FI                     | 4274608                        |
| Fixture luminous flux (lm)      | 1600                           |
| Luminaire efficacy (lm/W)       | 94                             |
| LOR (%)                         | 100                            |
| Colour temperature (K)          | 4000                           |
| Light colour                    | Warm White                     |
| CRI (Ra)                        | 90                             |
| Colour Consistency (SDCM)       | 3                              |
| Colour Variation Initial (SDCM) | 3                              |
| Glare control                   | < 19                           |
| Photobiological Risk Group      | RG1                            |
| Total power consumption (W)     | 17                             |
| Electrical protection           | Class II                       |
| Control gear type               | LED driver constant current    |
| LED Flickering Rate             | Ultra low (5% or less)         |
| Housing colour                  | RAL 9005 - Jet black           |

# Concord

Solstice 200 1600lm 940 SSC BB  
2070393

|                    |               |
|--------------------|---------------|
| IP rating          | IP40/20       |
| IK rating          | IK02          |
| Product EAN number | 5025768703937 |
| Warranty           | 5 years       |

## Photometry

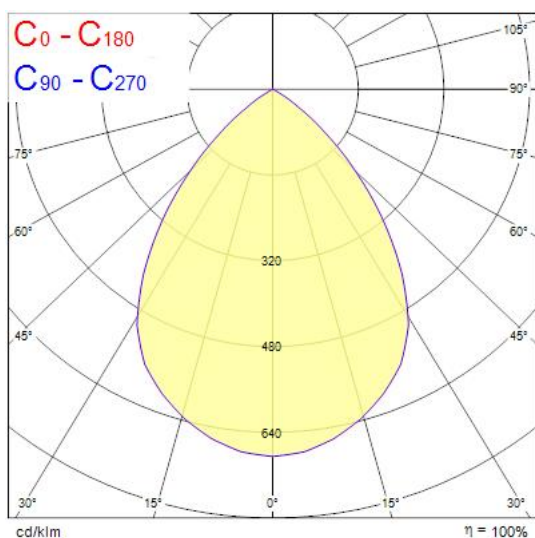

## Technical drawings

