


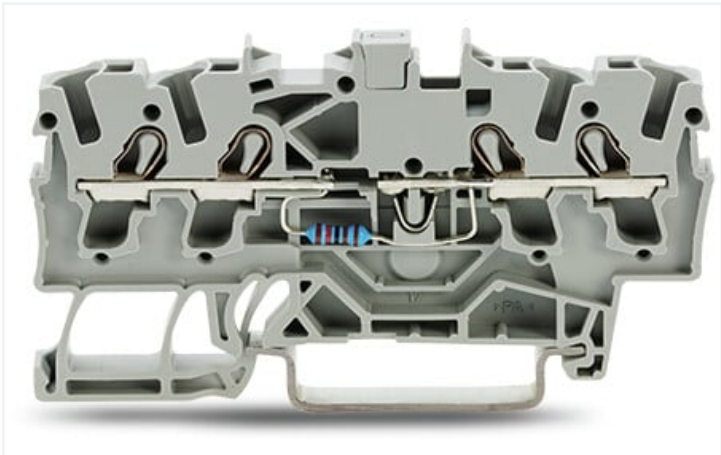

Color: ■ gray                      Similar to illustration

| Electrical data            |          |
|----------------------------|----------|
| Operating voltage          | 250 VAC  |
| Load current per potential | 24 A     |
| Power (max.)               | 0.6 W    |
| Thermal resistance         | 140 K/W  |
| Tolerance                  | ±1%      |
| Resistor type/design       | DIN 0207 |

| Safety and protection |      |
|-----------------------|------|
| Rated surge voltage   | 4 kV |
| Pollution degree      | 3    |
| Protection type       | IP20 |

| Connection data                 |                                     |
|---------------------------------|-------------------------------------|
| Connection points               | 4                                   |
| Total number of potentials      | 1                                   |
| Number of levels                | 1                                   |
| Connection technology           | Push-in CAGE CLAMP®                 |
| Actuation type                  | Operating tool                      |
| Connectable conductor materials | Copper                              |
| Solid conductor                 | 0.25 ... 4 mm² / 22 ... 12 AWG      |
| Fine-stranded conductor         | 0.25 ... 4 mm² / 22 ... 12 AWG      |
| Strip length                    | 10 ... 12 mm / 0.39 ... 0.47 inches |



| Physical data                     |                        |
|-----------------------------------|------------------------|
| Width                             | 5.2 mm / 0.205 inches  |
| Height                            | 69.9 mm / 2.752 inches |
| Depth from upper-edge of DIN-rail | 32.9 mm / 1.295 inches |

| Material data               |                  |
|-----------------------------|------------------|
| Color                       | gray             |
| Insulation material         | Polyamide (PA66) |
| Material group              | I                |
| Flammability class per UL94 | V0               |
| Fire load                   | 0.16 MJ          |
| Weight                      | 7.7 g            |

| Environmental requirements      |                |
|---------------------------------|----------------|
| Ambient temperature (operation) | -25 ... +70 °C |
| Processing temperature          | -35 ... +85 °C |

| Standards and specifications |                                        |
|------------------------------|----------------------------------------|
| Standards/specifications     | EN 60947-7-1<br>EN 60664-1<br>EN 60538 |

| Commercial data       |               |
|-----------------------|---------------|
| PU (SPU)              | 100 pcs       |
| Country of origin     | DE            |
| GTIN                  | 4055143806411 |
| Customs tariff number | 85369010000   |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance  
2002-1411/1000-984

↓