


Walraven RapidStrut® channel (BUP1000)

(H0413)

for medium weight fixing applications

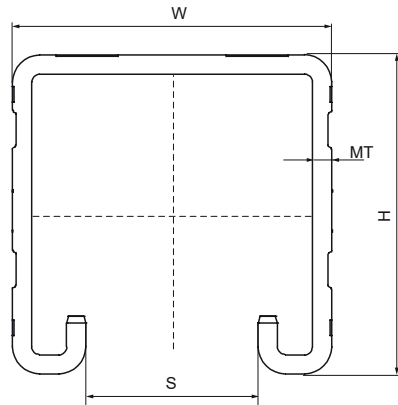

Features & benefits

- universal channel system
- corrosion protection remains intact after cutting
- distance between channel end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- with continuous smart hole pattern including round anchor holes
- with sawing marks each 50 mm on all 3 sides of the profile
- material: steel 1.0242 (S250GD)
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- Walraven RapidStrut® 41|H and 62|H tested for fire safety according to EN 1363-1
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



| Product Number | Type | Total Height | Total Width | Total Length | Material Thickness | Profile Opening |
|------------------|--------|--------------|-------------|--------------|--------------------|-----------------|
| Reference Letter | | H | W | L | MT | S |
| Unit description | | mm | mm | mm | mm | mm |
| 65018327 | 21 H | 21 | 41 | 3,000 | 2.50 | 22 |
| 65018347 | 41 H | 41 | 41 | 3,000 | 2.50 | 22 |
| 65018627 | 21 H | 21 | 41 | 6,000 | 2.50 | 22 |
| 65018647 | 41 H | 41 | 41 | 6,000 | 2.50 | 22 |
| 65018227 | 21 H | 21 | 41 | 2,000 | 2.50 | 22 |
| 65018242 | 41 M | 41 | 41 | 2,000 | 2.00 | 22 |
| 65018247 | 41 H | 41 | 41 | 2,000 | 2.50 | 22 |
| 65018342 | 41 M | 41 | 41 | 3,000 | 2.00 | 22 |
| 65018642 | 41 M | 41 | 41 | 6,000 | 2.00 | 22 |
| 65018667 | 62 H | 62 | 41 | 6,000 | 2.50 | 22 |
| 65018687 | 82 H | 82 | 41 | 6,000 | 2.50 | 22 |
| 65018367 | 62 H | 62 | 41 | 3,000 | 2.50 | 22 |
| 65018387 | 82 H | 82 | 41 | 3,000 | 2.50 | 22 |
| 65018244 | 41 L | 41 | 41 | 2,000 | 1.50 | 22 |
| 65018344 | 41 L | 41 | 41 | 3,000 | 1.50 | 22 |
| 65018444 | 41 L | 41 | 41 | 4,000 | 1.50 | 22 |
| 65018622 | 21 M | 21 | 41 | 6,000 | 2.00 | 22 |
| 65018644 | 41 L | 41 | 41 | 6,000 | 1.50 | 22 |
| 6501847050 | 41 H | 41 | 41 | 500 | 2.50 | 22 |
| 6501847075 | 41 H | 41 | 41 | 750 | 2.50 | 22 |
| 6501847100 | 41 H | 41 | 41 | 1,000 | 2.50 | 22 |
| 6501847120 | 41 H | 41 | 41 | 1,200 | 2.50 | 22 |
| 6501847180 | 41 H | 41 | 41 | 1,800 | 2.50 | 22 |
| 6501847240 | 41 H | 41 | 41 | 2,400 | 2.50 | 22 |