

SYL-LAB LED IP65 RECESSED 36W 4K OPAL 600 DALI 0055313



Features

- IP65 Panel DALI dimmable (Osram OTI DALI 50/220-240/1A4 LT2 FAN) , dual IP65 (above and below), recessed for t-grid ceiling, CRI80, tamper proof, steel construction, opal plexiglass diffuser, Tp(b) rated, 36W, 3950lm, 110lm/W, IK08, 4000K, 3 Step MacAdam Ellipse, driver current 800mA, Class 1, UGR<21, 220-240V, Average lifespan 90.000Hrs, HxWxD 595x595x107mm.


Product Overview

Product name	SYL-LAB LED IP65 RECESSED 36W 4K OPAL 600 DALI
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
General application	Logistics & Industry, Office
ETIM Class	EC002892
E-number FI	4306935
Fixture luminous flux (lm)	3950
Luminous flux (lm)	3950
Luminaire efficacy (lm/W)	110
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Glare control	< 21
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class I
Minimum dimming level (%)	1

SYL-LAB LED IP65 RECESSED 36W 4K OPAL 600 DALI 0055313

LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP65
IK rating	IK08
Product EAN number	5410288553139
Warranty	5 years
Dimming method	DALI, Switch-dim (mains-rated)
Colour Code	840
Useful luminous flux (#use)	3950

Photometry

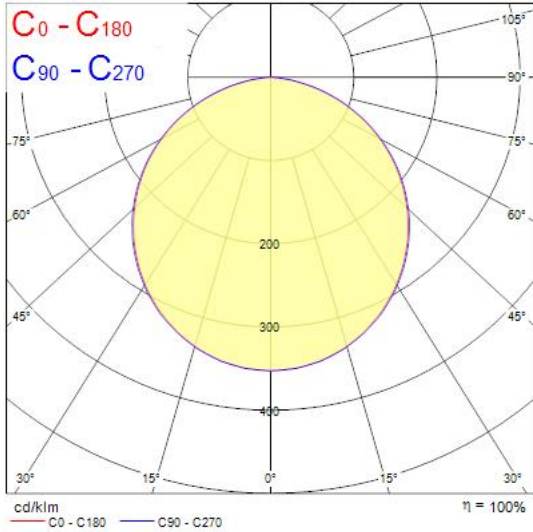

Technical drawings

