


Data Sheet | Item Number: 734-174/108-000

THT male header; 1.0 x 1.0 mm solder pin; angled; 100% protected against mismatching; Threaded flange; Pin spacing 3.5 mm; 14-pole; light gray

<https://www.wago.com/734-174/108-000>



Color: ■ light gray

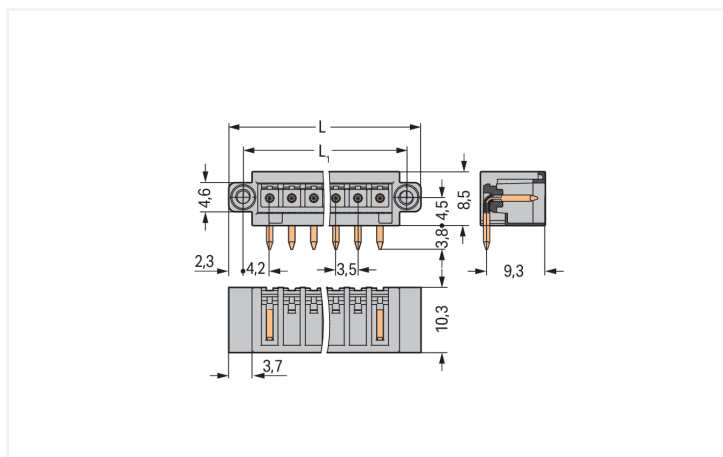


Dimensions in mm

$L = (\text{pole no.} \times \text{pin spacing}) + 9.5 \text{ mm}$
 $L1 = (\text{pole no.} \times \text{pin spacing}) + 4.9 \text{ mm}$

Male connector, 734 Series, solder pin dimensions 1 x 1 mm

This male connector (item number 734-174/108-000) provides fault-free electrical installations. The dimensions are (58.5 x 12.3 x 10.3) mm (width x height x depth).

Tin is used for coating the contact surfaces. The pcb connector is designed for THT soldering.

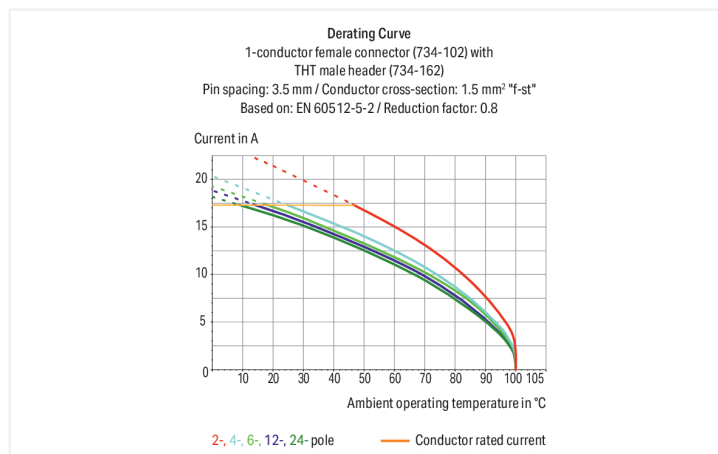



Notes	
Safety Information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Other pole numbers Gold-plated or partially gold-plated contact surfaces Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data			
Ratings per		IEC/EN 60664-1	
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	160 V	160 V	320 V
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV
Rated current	10 A	10 A	10 A
Approvals per		UL 1059	
Use group	B	C	D
Rated voltage	300 V	-	300 V
Rated current	10 A	-	10 A

Approvals per		CSA	
Use group	B	C	D
Rated voltage	300 V	-	300 V
Rated current	10 A	-	10 A

Connection Data	
Total number of potentials	14
Number of connection types	1
Number of levels	1

Connection 1	
Pole number	14

Physical data	
Pin spacing	3.5 mm / 0.138 inches
Width	58.5 mm / 2.303 inches
Height	12.3 mm / 0.484 inches
Height from the surface	8.5 mm / 0.335 inches
Depth	10.3 mm / 0.406 inches
Solder pin length	3.8 mm
Solder pin dimensions	1 x 1 mm
Drilled hole diameter with tolerance	1.4 (+0.1) mm

Mechanical data	
Variable coding	Yes
Anti-rotation protection	Yes



Plug-in connection		
Contact type (pluggable connector)		Male connector/plug
Connector (connection type)		for PCB
Mismating protection		Yes
Mating direction to the PCB		0°
Locking of plug-in connection		Threaded flange

PCB contact		
PCB contact		THT
Solder pin arrangement		over the entire male connector (in-line)
Number of solder pins per potential		1

Material data		
Note (material data)		Information on material specifications can be found here
Color		light gray
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Contact material		Electrolytic copper (E _{Cu})
Contact Plating		Tin
Fire load		0.06 MJ
Weight		4.2 g

Environmental requirements		
Limit temperature range		-60 ... +100 °C
Processing temperature		-35 ... +60 °C

Commercial data		
PU (SPU)		50 pcs
Packaging type		Box
Country of origin		PL
GTIN		4045454685539
Customs tariff number		85366930000

Product Classification		
UNSPSC		39121409
eCl@ss 10.0		27-44-04-02
eCl@ss 9.0		27-44-04-02
ETIM 9.0		EC002637
ETIM 10.0		EC002637
ECCN		NO US CLASSIFICATION



Environmental Product Compliance	
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	72761132-8f4a-4a26-b0cb-8cc87e75e56f
SCIP notification number (Belgium)	6c0e358f-fad5-4064-8e31-18a06b284aac
SCIP notification number (Bulgaria)	9e9853e4-6556-46a8-be97-d36d8a85dab8
SCIP notification number (Czech Republic)	380fb745-fa84-4e02-b22a-a4103185fb5c
SCIP notification number (Denmark)	2fdfd861-ecc2-44fa-9883-fd58ef562ea2
SCIP notification number (Finland)	ea0753ea-b51b-4f69-b0b8-1530fc244bc4
SCIP notification number (France)	51ab3f65-d01c-4811-bc85-2ca661c7172a
SCIP notification number (Germany)	543dfd20-4c1d-4f6b-a077-d52fcf2f250f
SCIP notification number (Hungary)	053e52ba-d077-4058-a445-8862d851780f
SCIP notification number (Italy)	fd1cf745-7da3-448f-85d2-ab955d29dc20
SCIP notification number (Netherlands)	0f323087-d7c4-400a-b55b-446a730eea12
SCIP notification number (Poland)	fa2d3839-5268-4cae-920c-62282c8d5318
SCIP notification number (Romania)	66cd14ba-19b3-4e9e-9685-5e1969bd0abe
SCIP notification number (Sweden)	bf806f96-d1f1-4d8d-8e90-9acdf30d89fc

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
734-174/108-000

↓

Documentation

Additional Information

Technical Section

03.04.2019

pdf
2027.26 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models
734-174/108-000

↓

CAE data

ZUKEN Portal
734-174/108-000

↓

PCB Design

Symbol and Footprint
via SamacSys
734-174/108-000

↓

Symbol and Footprint
via Ultra Librarian
734-174/108-000

↓

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



Item No.: 734-114/107-000
1-conductor female connector; CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 14-pole; 100% protected against mismatching; Screw flange; 1,50 mm²; light gray



Item No.: 2734-114/107-000
1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 14-pole; 100% protected against mismatching; Screw flange; 1,50 mm²; light gray

1.2 Optional Accessories

1.2.1 Coding


1.2.1.1 Coding



Item No.: 734-159
Coding key; to be snapped above top level; black

Installation Notes

Coding



Coding a male header – fitting coding key(s).