

Motion detector, 230 V, 9 m, for flush-mounting box, white

350-100111

CE CE

4 year warranty



Detection range

H	A Across	B Towards
2 m	ø 6.5 m	ø 4 m
2.5 m	ø 8 m	ø 5 m
3 m	ø 9 m	ø 6 m
3.5 m	ø 9 m	ø 6.5 m


The one channel motion detector is suitable for automatic indoor lighting control (on/off). It can be installed in a flush-mounting box in the ceiling. Spring clips and an IP54 surface-mounting box can be ordered separately. In conformity with the European directive for EMC and safety EN60669-2-1.

Colour: white

Compatible secondary detectors:

Compatible master detectors:


- Motion detector for standard applications
- Robust relay (300 W LED)
- Automatic or manual on/off
- Detection area can be modified by means of an adjustable cover mask
- IP54 surface-mounting box and spring clips available as accessories
- Commissioning via potentiometers
- Automatic or manual on/off

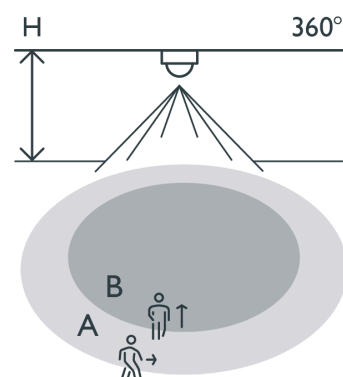

Technical features

Configuration	stand-alone
Input voltage	230 Vac
Detector output	230 V (ON/OFF)
Switch-off delay	pulse, 30 sec – 1,800 sec
Maximum power consumption	0.5 W
Maximum MCB rating	-10
Detection angle	360 °
Detection range (PIR)	ø 9 m from a height of 3 m
Minimum ambient temperature	-20 °C
Maximum ambient temperature	+45 °C
Mounting method	flush-mounting box
Mounting height	2 m – 3.5 m
Colour	white
Colour RAL (approximately)	9010
Dimensions visible (HxWxD)	105 mm x 105 mm
Dimensions (HxWxD)	105 mm x 105 mm x 62.5 mm
Protection degree standalone	IP20

Dimensions



Wiring diagram

