

Wall mounted receptacle

Part number: 7311



MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.MENNEKES.org

Product Description

- pre-wired for installation
- fused with fuse socket 63A 3p D02
- X-CONTACT
- internal fixing
- 20° inclination

Technical Details

Wall mounted receptacle - Part No. 7311	7311
Ampere	63A
Number of poles	5p
Clock position	6h
Nominal voltage AC	400V
Nominal frequency	50 - 60 Hz
Protection type IP	IP67
Contact carrier	standard
X-CONTACT	yes
Screw drive external screws	slot
Pilot contact	without pilot contact
Pilot contact switch	no
Neozed	63A 3p D02
DIN rail	yes
Inspection window	yes
Cable entry at the top	1 x M40
Cable entry at the bottom	2 x M40
Enclosure base can be turned 180°	no
Insertion direction	angled
Inclination	20°
Type of mounting	internal fixing
Highly resistant to chemicals	no
LED voltage indicator	no
Conductor cross-section min.	6 mm ²
Conductor cross-section max.	25 mm ²

Wall mounted receptacle - Part No. 7311	
	7311
Weight (net)	2432 g
Packaging unit	3 pcs
Quantity per pallet	75 pcs
EAN / identification number	4015394132202

Permissible ambient conditions		
	Min.	Max.
Permissible ambient temperature	-25 °C	40 °C
Average temperature over 24 hours		35 °C

Material properties	
Base	PC light grey [similar RAL 7035]
Upper part	PC light grey [similar RAL 7035]
Hinged lid	PBT/PC red [similar RAL 3013]
	TPE black [similar RAL 9005]
	PBT/PC squirrel grey [similar RAL 7000]
	TPE anthracite [similar RAL 7016]
External screws	PA6 light grey [similar RAL 7035]

Material resistance	
The material resistance overview can be found on the website in the section "Knowledge" - "Product knowledge" - "Materials".	

Material and environmental properties	
RoHS 2011/65/EU inkl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	no

Regulations and Standards

Norm

DIN EN IEC 60309-2


Declaration of Conformity

CE

Test label

CQC

Dimensional Drawing

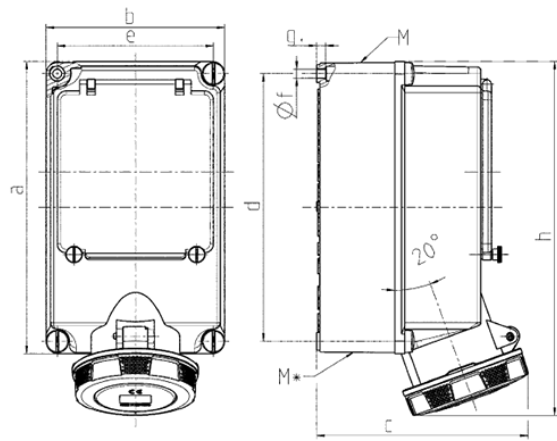

Drawing 1 MB 619	Amp. Poles	63	
		4	5
Dim. in mm	a	264	264
	b	163	163
	c	191	191
	d	240	240
	e	140	140
	f	8.1	8.1
	g.	8	8
	h	319	319
	M	40	40
	M*	2x40	2x40
	Max. cable diam. (mm)	27	27
Terminal for cond. cross section (mm ²) min.-max.		6 —25	6 —25