

Product data sheet Spirotech

Product name

SpiroVent -1 1/4" -Hor -St.Steel -HighT -AISI316

Article number

AA125/R007

Product properties


A stainless steel (microbubble) deaerator for high-temperature systems (max. 180 °C) with a horizontal 1 1/4" connection.

- Removes all circulating air and microbubbles effectively
- Applicable for high temperature system configurations
- Removes trapped air when installed at the correct location
- Greatly reduces the need for manual venting
- Constant low-pressure drop
- No unnecessary shutdown
- Connection diameter 1 1/4" (G1 1/4)
- Exceptional guarantee

Product image



Product dimensions

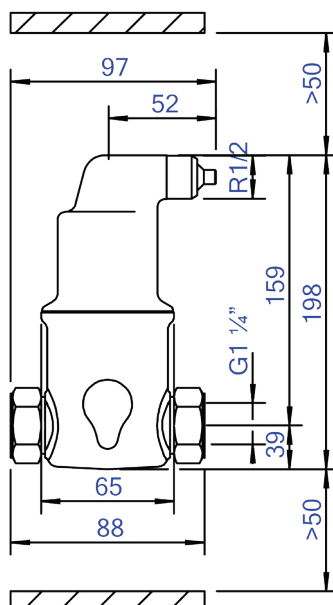

Product data sheet Spirotech

ETIM product data

Housing material	Stainless steel	Construction length	88 mm
With drain valve	No	Article compression class	PN 10
Housing material quality	Stainless steel 316 L (1.4404)	Surface protection	Untreated
Backwash filter	No	Suitable for open system	No
Max. operating pressure	10 bar	Suitable for closed system	Yes
Variable flow direction	Yes	Suitable for solar	No
With insulation	No	With dismountable filter	No
Separator type	Air	Filter volume	0.25 l
Connection	Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1)	Magnet operating principle	No
Model	Horizontal	With automatic de-aerator	Yes
Nominal diameter	1 1/4 inch (32)	With integrated replenishment automat	No
Max. glycol mixture	50 %	With couplers	Yes
Suitable for heating	Yes	Material of connection	Other
Suitable for cooling	Yes	Inlet/outlet offset distance	0 mm

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website

