



The transponder card reader unit allows the recognition of cards with RFID-MIFARE® transponder technology (use cards from the Gewiss catalogue). Card recognition is reported to the GW-HOST hotel access control and management software. The device is equipped with 2 inputs for potential-free contacts and 2 NO relay outputs for SELV circuits. The inputs can be used to detect the status of sensors or to send on/off and toggle commands, dimming commands (1 or 2 buttons), shutter commands, sequence commands, scenario commands, short/long press commands; the pulse counter function is also available. The outputs can control generic loads on, off, timed on, with flashing. The device implement advanced logical functions and the "Virtual holder" function.

Category	Transponder card reader unit MIFARE®	Colour	Titanium
Material	Front plate in technopolymer (included)	Installation	Flush mounting on 3-modules rectangular (GW24403, GW24403PM), round (GW24234, GW24234PM) or square (GW24231) boxes
Power supply	SELV: 12-24 V ac 50/60 Hz, 12-32 V dc	Current absorbed by power supply	30 mA a 24 V dc
Interfaces	KNX TP1	Current absorbed by KNX bus (mA)	Max 10 mA a 29 V
Technology	Trasponder RFID-MIFARE®	No. output channels	2
Output contacts	Max switching voltage 30 V dc / 24 V ac Max switching current 5 A (AC1) 1 A (AC3)	No. input channels	2
Input voltage	Potential free	Wiring terminals	With screw
Terminal tightening capacity stranded cables (mm²)	Max. 1,5	Terminal tightening capacity solid cables (mm²)	Max. 1,5
Working temperature	-5 ÷ +45 °C	Relative humidity (non-condensative)	Max 90%
Stocking temperature	-5 ÷ +55 °C	Connection to the KNX bus	KNX bus terminal
Dimensions LxHxD (mm)	110,0x78,0x12,1	IP degree	IP20 (with plate fitted)
Standard	Directive RED 2014/53/UE; Directive RoHS 2011/65/EU + 2015/863; EN 63044-3; EN 63044-5-1; EN 63044-5-2; EN 300 330;_x000D_ EN 301 489-3; EN IEC 63000		

DIMENSIONAL

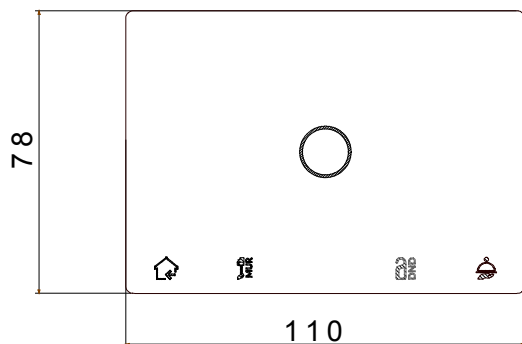

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 02/04/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice