

136-301 5700K specific configuration
Batten light | 1203mm | 40W | IP20 | 3-CCT

Introduction

Purpose of this Document

This document provides information for 136-301 5700K. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	37.2 W
Correlated Colour Temperature	6219 K
Total lumen output	4530 lm
Efficiency	122 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	231 V
RMS Input current feed. I_{RMS}	0.173 A
Total input power	37.2 W

Frequency of input power	50 Hz
Power factor	0.93
Displacement power factor	0.95

Total harmonic distortion of the current	19.7%
Total harmonic distortion of the voltage	2.83%

Input Power Curve

Voltage - Current

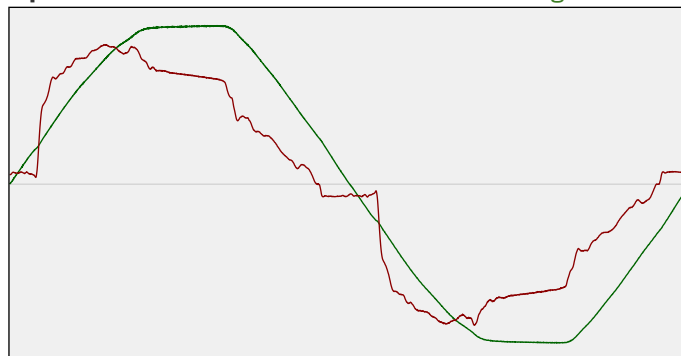

Efficiency

Radiated power efficiency: 40.4%




Lumen efficiency: 122 lm/W



Harmonics

3rd Harmonic	11.66%
5th Harmonic	11.79%
7th Harmonic	3.77%
9th Harmonic	6.77%
11th Harmonic	3.29%

Current Harmonics %

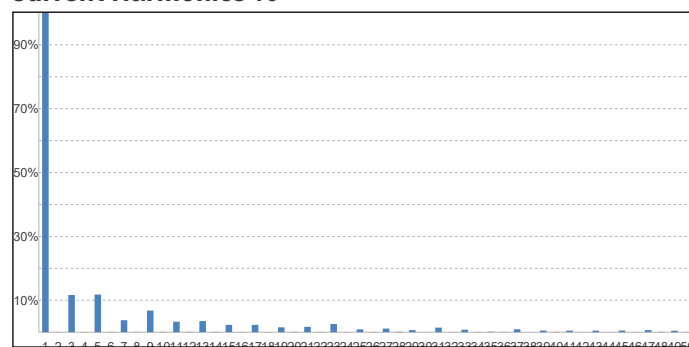


136-301 5700K specific configuration

Colour measurement details


Total lumen output 4530 lm
 Correlated Colour Temperature 6219 K
 Colour coordinates CIE 1931 (x;y) = (0.318;0.327)
 Colour deviation from BBL Duv = -0.0005

TM30-18 Colour Fidelity Index R_f 85.8
 TM30-18 Colour Gamut Index R_g 97.5
 Colour Rendering Index (Ra) CRI 87.8
 Colour Rendering Index. (red component) $R_9 = 33.9$


Colour Quality Scale CQS = 84.1
 Television Lighting Consistency Index TLCI = 83

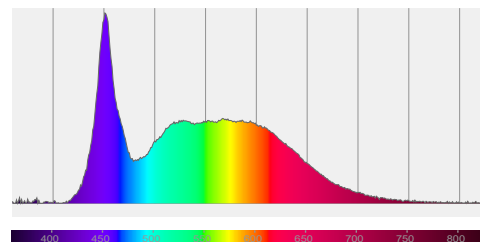

Relative spectral power distribution

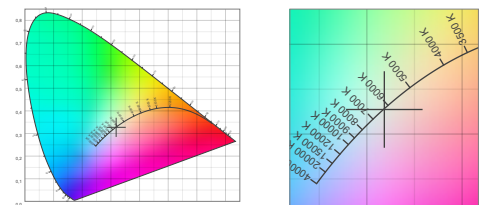

TM30 details

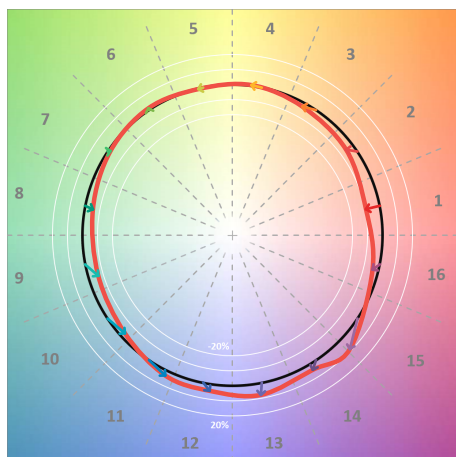


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	82	-10%	0%
C2	87	-6%	5%
C3	83	-3%	9%
C4	87	0%	7%
C5	88	0%	3%
C6	94	1%	0%
C7	95	-1%	-1%
C8	90	-6%	1%
C9	87	-7%	9%
C10	75	-4%	15%
C11	76	3%	15%
C12	89	5%	5%
C13	89	8%	-2%
C14	88	4%	-5%
C15	77	7%	-20%
C16	90	-4%	-4%

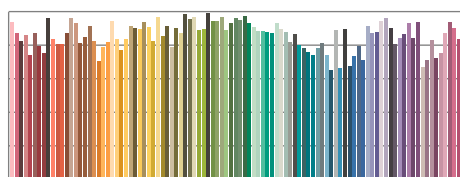

TM30-18 R_f -values per reference colour

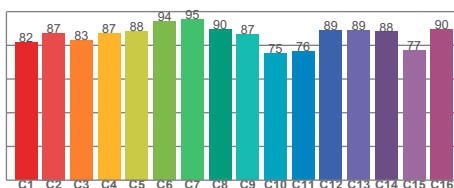


TM30-18 R_f -values per hue bin

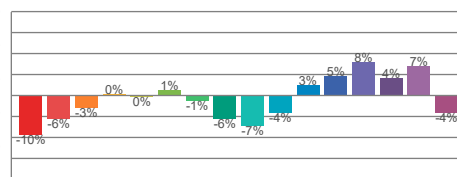


TM30 Chroma shift

Colour Quality details

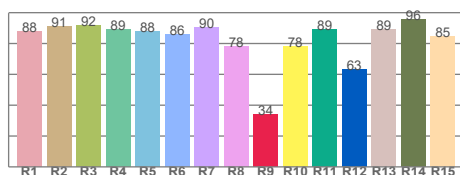

Colour Rendering Index

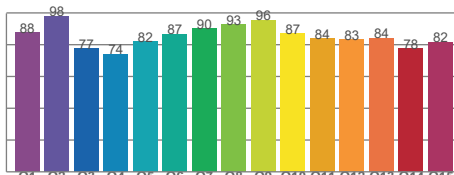

Colour Quality Scale