





### Features

- Sleek and compact design Low energy consumption Instant light at the flick of switch No glare thanks to frosted diffuser 15,000 hours rated lamp life Good colour rendering - CRI80 Non-dimmable 3 years warranty The perfect lamp for cabinet lighting in kitchens, bedrooms and for displays and showcases

### Product Overview

|                                 |                                  |
|---------------------------------|----------------------------------|
| Product name                    | ToLEDo MicroLynx V2 470LM 840 SL |
| Technology                      | LED                              |
| Watt (Rated) (W)                | 5                                |
| Cap/Base                        | GX53                             |
| Fixture rating                  | Open                             |
| E-number FI                     | 4741147                          |
| Colour temperature (K)          | 4000                             |
| CRI (Ra)                        | 80                               |
| Colour Variation Initial (SDCM) | 6                                |
| Photobiological Risk Group      | RG0                              |
| Wattage (W)                     | 5                                |
| Product EAN number              | 5410288296951                    |
| Warranty                        | 3 years                          |

## Technical drawings

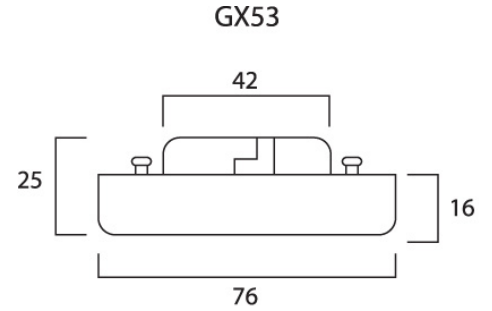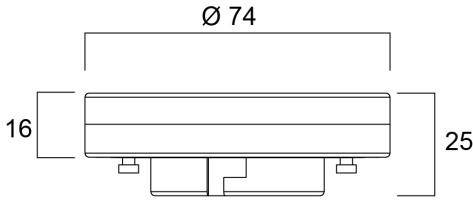

## Data table

### GENERAL DATA

|   |                                  |
|---|----------------------------------|
| Product name                            | ToLEDo MicroLynx V2 470LM 840 SL |
| Technology                              | LED                              |
| Watt (Rated) (W)                        | 5                                |
| Cap/Base                                | GX53                             |
| Fixture rating                          | Open                             |
| Operating temperature range (°C)        | -20°C...+40°C                    |
| Performance ambient temperature Tq (°C) | 25                               |
| E-number FI                             | 4741147                          |
| Warranty                                | 3 years                          |

### OPTICAL DATA

|                            |      |
|----------------------------|------|
| Luminous flux (Rated) (lm) | 470  |
| Colour temperature (K)     | 4000 |
| CRI (Ra)                   | 80   |

## ToLEDo MicroLynx V2 470LM 840 SL 0029695

|  |     |
|--|-----|
| Colour Variation Initial (SDCM)              | 6   |
| Photobiological Risk Group                   | RG0 |
| Lumen maintenance at end of nominal life (%) | 70  |

### ELECTRICAL DATA

|  |         |
|--|---------|
| Wattage (W)                              | 5       |
| Equivalent watt (W)                      | 40      |
| Primary Supply/Product voltage - min (V) | 220     |
| Control gear required                    | No      |
| Inrush Current (A)                       | 2.4     |
| Inrush Duration ( $\mu$ s)               | 420     |
| Lamp Energy Label (class)                | F       |
| Nominal Frequency (Hz)                   | 50/60Hz |

### LIFETIME DATA

|                          |       |
|--------------------------|-------|
| Lifespan L70 B50         | 15000 |
| Average life (Rated) (h) | 15000 |

### PHYSICAL DATA

|                               |       |
|-------------------------------|-------|
| Nominal Product Length (mm)   | 75    |
| Nominal Product Diameter (mm) | 25    |
| Weight (kg)                   | 0.048 |

### PACKAGING

|                                      |                |
|--------------------------------------|----------------|
| Single packaging type                | Carton         |
| Product EAN number                   | 5410288296951  |
| Packaging single width (cm)          | 2.7            |
| Packaging single depth (cm)          | 7.6            |
| DUN14 (outer)                        | 15410288296958 |
| Packaging outer length / height (cm) | 16.0           |

### SAFETY DATA


# SYLVANIA

ToLEDo MicroLynx V2 470LM 840 SL  
0029695

|                                     |  |
|-------------------------------------|--|
| Optimal operating condition (°C)    | -20-40                                     |
| Breakage cleaning instructions      | Not applicable                             |
| Special purpose lamp                | No   |
| Dry applications use only           | No   |
| Suitable for household illumination | No   |
| Safety message                      | Not Suitable for totally enclosed fixtures |

## Energy label

 **ENERG**   
**SYLVANIA**  
0029695

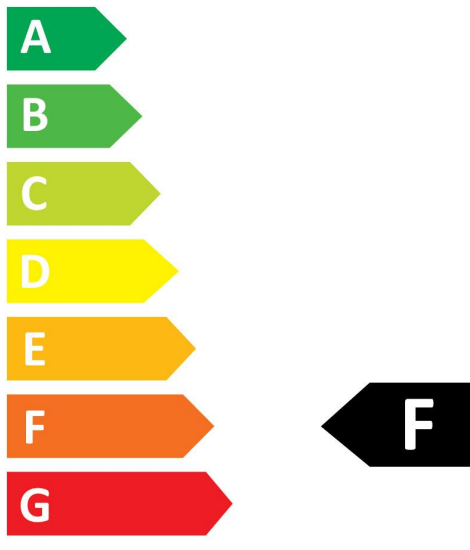


**5**  
kWh/1000h



2019/2015

 **ENERG**   
**SYLVANIA**  
0029695

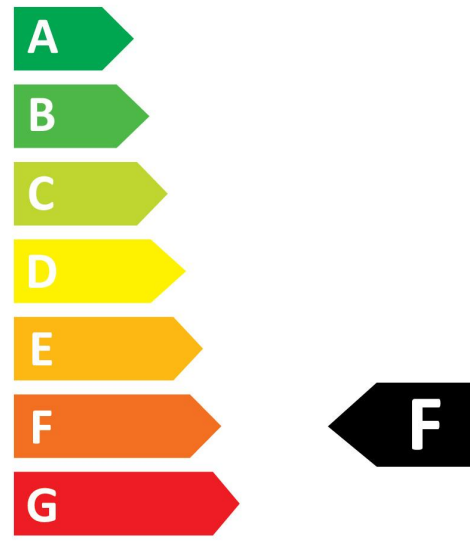

**5**  
kWh/1000h



2019/2015

Light your world