

INSAVER IP65


INSAVER UGR19 IP65 150 1200LM 840

0030529



Product features

- InsaVer is a ceiling recessed LED downlight (IP65 from the front and back), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9.5W; 1200lm; 126lm/W; 4000K; UGR <19 with shallow product depth 50mm. IK07 for the fixture, IK03 for the IP driver box. When using with EM kit (0046600& 0046601), protection IP65 kept only from the front. Meets TP(a) requirements.

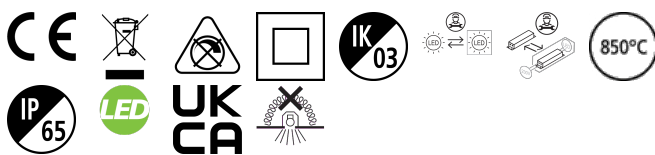

PRODUCT OVERVIEW


| | |
|-----------------------------------|-----------------------------------|
| Product name | INSAVER UGR19 IP65 150 1200LM 840 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| General application | Hospitality, Office, Retail |
| ETIM Class | EC001744 |
| E-number FI | 4579607 |
| Warranty | 5 years |
| Useful luminous flux (Fuse) | 1200 |
| Fixture luminous flux (lm) | 1200 |
| Luminaire efficacy (lm/W) | 126 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 70 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 9.5 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | No |
| Dimming method | N/A |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9010 - Pure white |
| IP rating | IP65 |
| IK rating | IK03 |
| Product EAN number | 5410288305295 |

PHOTOMETRY

INSAVER IP65

INSAVER UGR19 IP65 150 1200LM 840

0030529

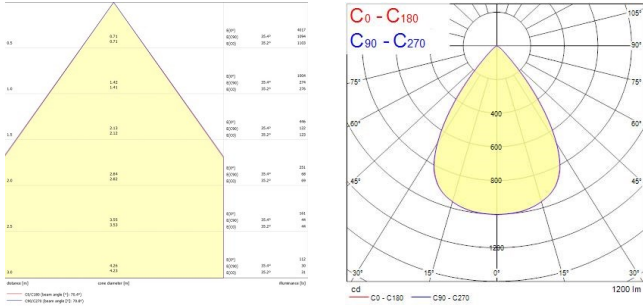

TECHNICAL DRAWINGS

