

SYLVEO LED 8000LM ROAD ASYMMETRIC 4K DALI 0049141



Features

- Exterior LED floodlight, comes complete with a 1000mm cable and adjustable bracket, aluminium housing, clear glass diffuser, 8542lm, 80W, 106lm/W, 4000K, 2280mA, CRI70, 52°x117° beam angle, DALI dimmable, IP66, IK08, Class I, 50000hrs, (LxWxD) 66x290x333mm


Product Overview

Product name	SYLVEO LED 8000LM ROAD ASYMMETRIC 4K DALI
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579199
E-number SE	7764819
Fixture luminous flux (lm)	8542
Luminaire efficacy (lm/W)	107
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	70
Colour Variation Initial (SDCM)	6
Beam Angle (°)	52 x 117
Glare control	< 18
Photobiological Risk Group	RG1
Total power consumption (W)	80

SYLVEO LED 8000LM ROAD ASYMMETRIC 4K DALI 0049141

Electrical protection	Class I
Control gear type	Electronic ballast
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9006
IP rating	IP66
IK rating	IK08
Product EAN number	5410288491417
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	8542

Photometry

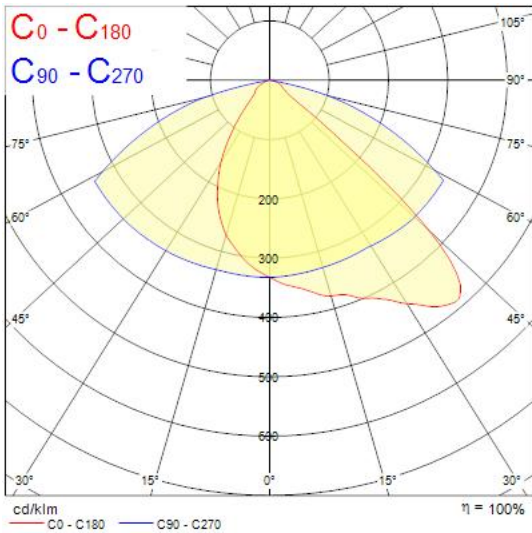

Technical drawings

