




6M.Tx

6M.Tx.9.024.1200			
TRMS AC or DC MODBUS POWER MONITOR	6M.TA	6M.TB	6M.TF
I _{max} / U _{max} AC	50/800	100/800	300/800
I _{max} / U _{max} DC	50/1000	100/1000	400/1000
U DC	9... 24 (U _N)...30		
Modbus RS485	1200...115200 baud, 8, N, 1		
T (-15...+65)°C			
IP 20			

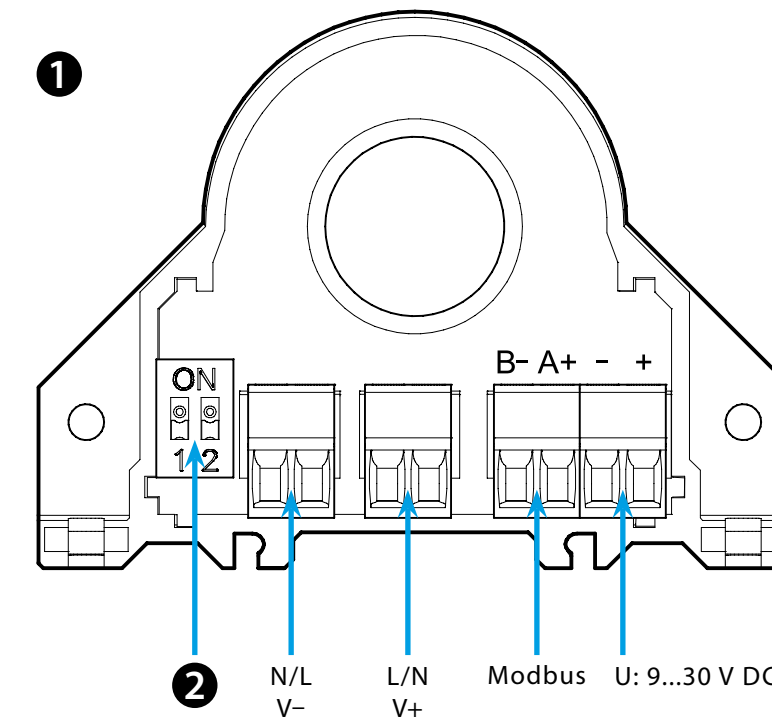


Utility Model - IB6MTXVXX - 03/23 - Finder S.p.A. con unico socio - 10040 ALMESE (TO) - ITALY

2

Default
Address: 1
Baud: 9600
Modbus RS485

Address: 1
Baud: 38400
Modbus RS485

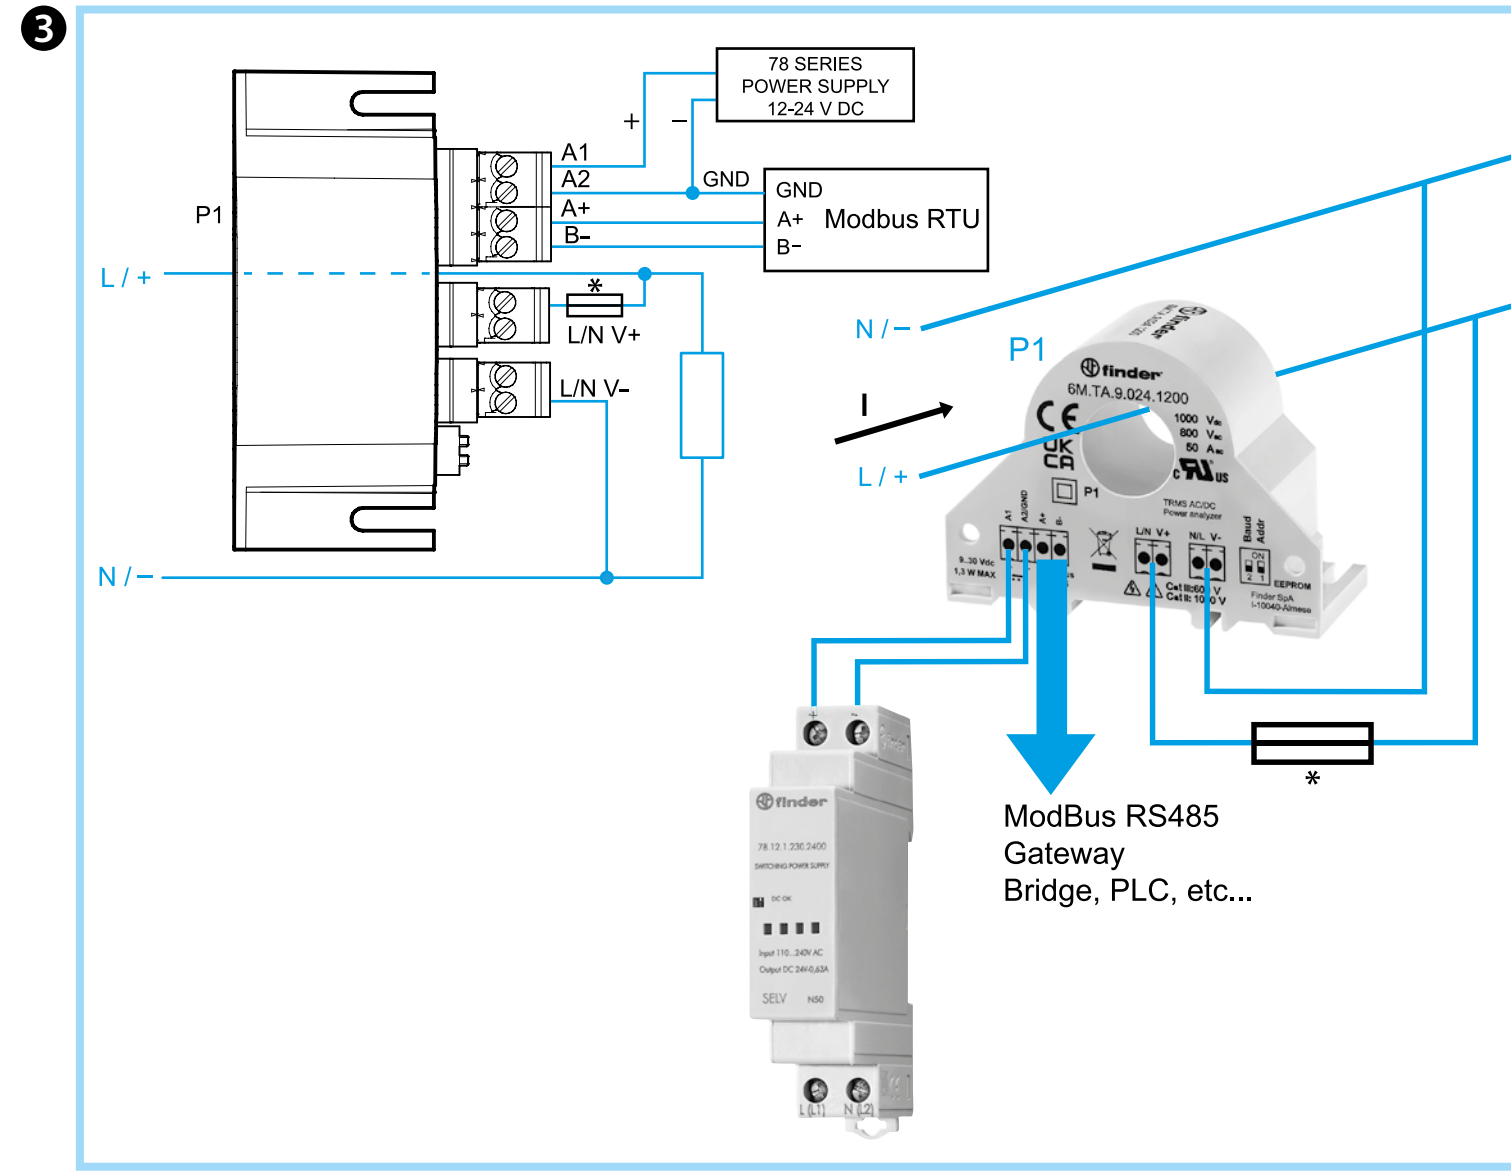

4

A B C D E F G H

6M.Tx.9.024.1200
MODBUS RS485 ENKELFASE POWER ANALYZER

- 1 AANSLUITINGEN**
- 2 INSTELLINGEN**
* Aangepaste instellingen bewaard in het interne geheugen (EEPROM)
- 3 AANSLUITSCHEMA**
* 100 mA - Typ langzaam
- 4 DIN RAIL MONTAGE**
A-B-C-D Verticaal
E-F-G-H Horizontaal

OPMERKING
Volledige gebruikershandleiding te downloaden via de Finder site