

## 136-118 14W 6000K specific configuration

Reflector downlight eco | white | Ø174mm | 14/20W | 3-CCT

### Introduction

#### Purpose of this Document

This document provides information for 136-118 14W 6000K. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

#### Results

Total input power	13.5 W
Correlated Colour Temperature	6236 K
Total lumen output	1405 lm
Efficiency	104 lm/W

### Electrical measurement details

#### Input Power


RMS Input voltage feed. $V_{RMS}$	234 V
RMS Input current feed. $I_{RMS}$	0.062 A
Total input power	13.5 W

Frequency of input power	50 Hz
Power factor	0.93
Displacement power factor	0.94

Total harmonic distortion of the current	13.19%
Total harmonic distortion of the voltage	2.26%

#### Input Power Curve

Voltage - Current

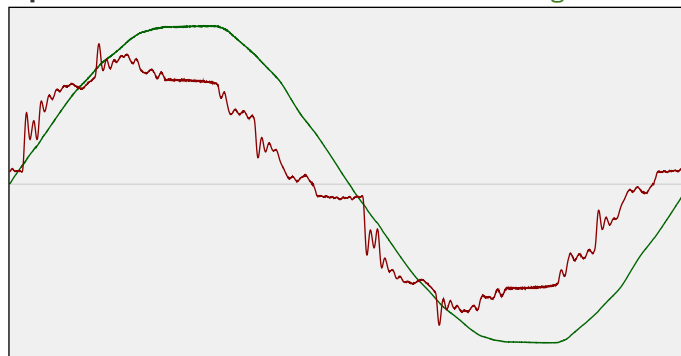

#### Efficiency

Radiated power efficiency: 34.1%




Lumen efficiency: 104 lm/W



#### Harmonics

3rd Harmonic	6%
5th Harmonic	8.02%
7th Harmonic	3.32%
9th Harmonic	4.59%
11th Harmonic	2.4%

#### Current Harmonics %

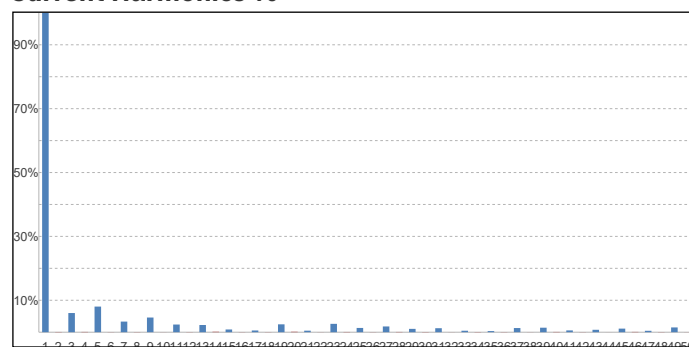


## 136-118 14W 6000K specific configuration

### Colour measurement details


Total lumen output 1405 lm  
 Correlated Colour Temperature 6236 K  
 Colour coordinates CIE 1931 (x;y) = (0.318;0.327)  
 Colour deviation from BBL Duv = -0.0007

TM30-18 Colour Fidelity Index  $R_f$  83.9  
 TM30-18 Colour Gamut Index  $R_g$  94.9  
 Colour Rendering Index (Ra) CRI 86.8  
 Colour Rendering Index. (red component)  $R_9 = 27.6$


Colour Quality Scale CQS = 82.1  
 Television Lighting Consistency Index TLCI = 78

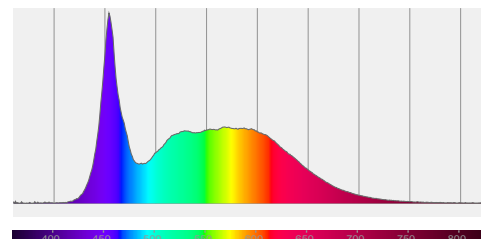

Relative spectral power distribution

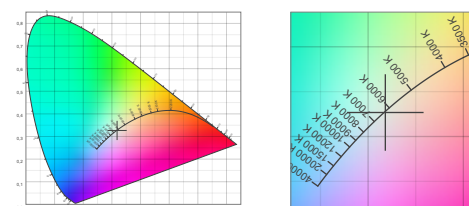

### TM30 details

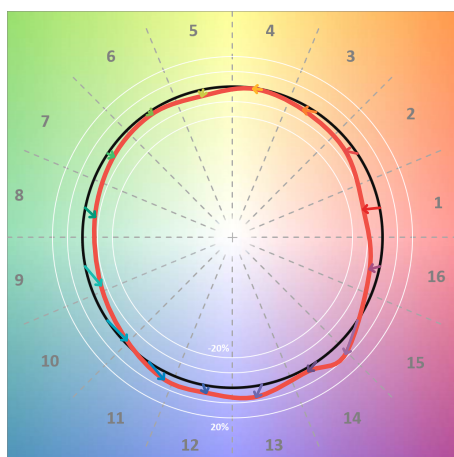


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	$R_f$	Shifts (%)	
		Chroma	Hue
C1	78	-11%	1%
C2	86	-6%	6%
C3	83	-4%	8%
C4	88	-1%	6%
C5	87	-4%	2%
C6	93	-2%	-1%
C7	92	-4%	-1%
C8	85	-8%	5%
C9	82	-8%	14%
C10	71	-3%	18%
C11	76	4%	14%
C12	91	5%	3%
C13	87	7%	-5%
C14	87	2%	-7%
C15	73	6%	-23%
C16	88	-6%	-3%

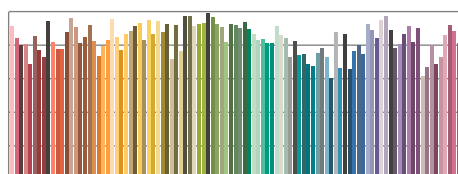

TM30-18  $R_f$ -values per reference colour

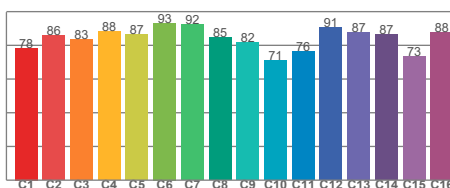


TM30-18  $R_f$ -values per hue bin

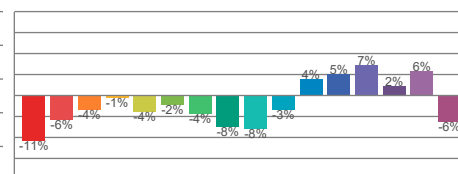


TM30 Chroma shift

### Colour Quality details

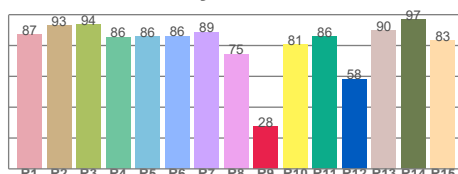

Colour Rendering Index

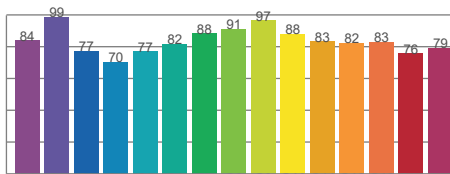

Colour Quality Scale