

Features

• Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured white finishing colour Light color temperature: 4000K, natural white System power: 14W, Fixture lumen output: 1650lm, efficacy: 118lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.60mmx150mm 5 years warranty


Product Overview

|                            |                                                             |
|----------------------------|-------------------------------------------------------------|
| Product name               | PIXO SMALL 1650LM 940 NB MB WB WHITE                        |
| Technology                 | LED                                                         |
| Cap/Base                   | N/A                                                         |
| Housing                    | Aluminium                                                   |
| Mount                      | Track mounting                                              |
| General application        | Museums & Galleries, Retail, Office, Residential & Consumer |
| ETIM Class                 | EC001744                                                    |
| E-number FI                | 4279597                                                     |
| Fixture luminous flux (lm) | 1650                                                        |

PIXO SMALL 1650LM 940 NB MB WB WHITE  
0004546

|                                   |                             |
|-----------------------------------|-----------------------------|
| Luminaire efficacy (lm/W)         | 118                         |
| Correlated colour temperature (k) | 4000                        |
| Light colour                      | Neutral White               |
| CRI (Ra)                          | 90                          |
| Colour Variation Initial (SDCM)   | 4                           |
| Beam Angle (°)                    | 36                          |
| Photobiological Risk Group        | RG1                         |
| Total power consumption (W)       | 14                          |
| Electrical protection             | Class II                    |
| Control gear type                 | LED driver constant current |
| Dimmable                          | No                          |
| Housing colour                    | White                       |
| IP rating                         | IP20                        |
| IK rating                         | IK03                        |
| Product EAN number                | 5410288045467               |
| Warranty                          | 5 years                     |
| Dimming method                    | N/A                         |
| Useful luminous flux (#use)       | 1650                        |

Photometry

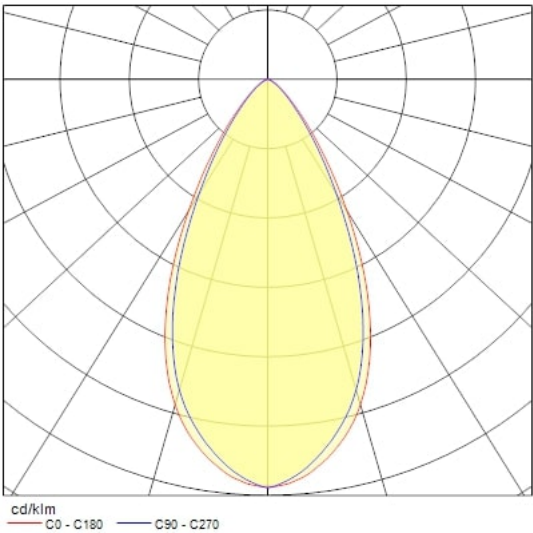

Technical drawings

