

# TECHNICAL DATA SHEET

## DucoVent ZR

In combination with a pressure-controlled fan (Duco RoofFan), DucoVent ZR valves ensure a continuous air flow. The valves are easy to fit and do not require adjustment. The lip seal ensures a tight seal and placement. The front is removable for easy cleaning.




### Versions

Type	Suitable for	Article number
DucoVent ZR 30m³/h (sound attenuating)	Outlet (only in combination with Duco RoofFan)	0000-4615
DucoVent ZR 60m³/h (sound attenuating)	Outlet (only in combination with Duco RoofFan)	0000-4616
DucoVent ZR 75 m³/h	Outlet (only in combination with Duco RoofFan)	0000-4617
DucoVent ZR 90 m³/h	Outlet (only in combination with Duco RoofFan)	0000-4621


### Physical characteristics

<b>Material:</b>	plastic
<b>Material mounting ring:</b>	rubber
<b>Shape:</b>	round
<b>Front diameter:</b>	180 mm
<b>Recess depth:</b>	24 mm
<b>Colour:</b>	white (RAL 9016)
<b>Weight:</b>	110 g
<b>Mounting:</b>	Vertical wall or ceiling mounting (preferably screws in the screw holes provided in the support plate)
<b>Connection:</b>	Diameter 100-125 mm (flexible or rigid ducts)
<b>Pressure range:</b>	50 - 160 Pa

### Dimensions

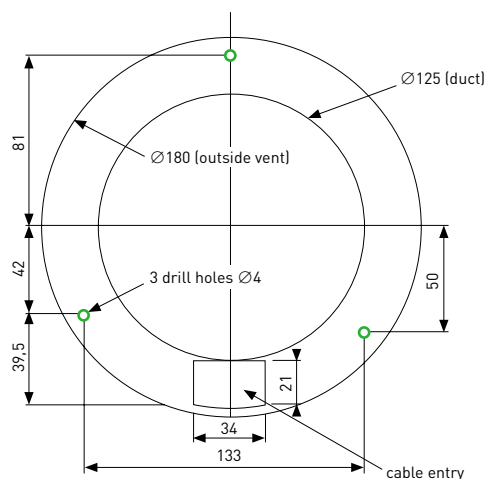

### Technical features

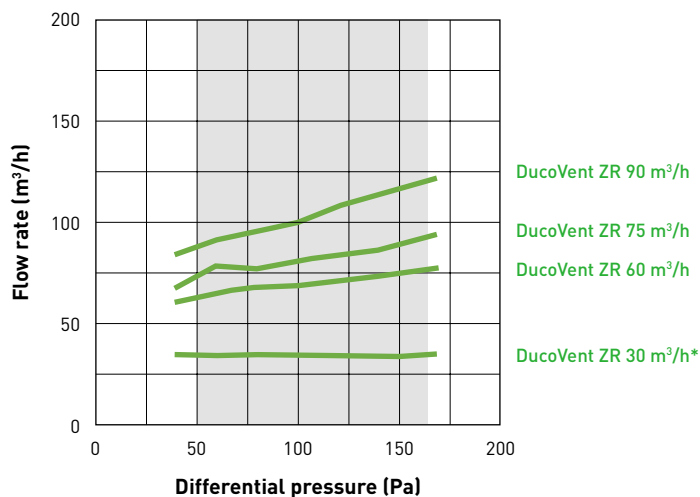

\* Curves from CETIAT test reports

### CETIAT test reports no. 2714172

DucoVent ZR	Lw in dB(A)				Dn,e,w (C) dB	
	70 Pa	100 Pa	136 Pa	160 Pa	with PAM	
30 m3/h	25	30	35	38	56	60

certified values