



Data Sheet | Item Number: 2002-1712/1000-867


3-conductor fuse terminal block; with pivoting fuse holder; with end plate; for 5 x 20 mm miniature metric fuse; with blown fuse indication by LED; 120 V; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; orange

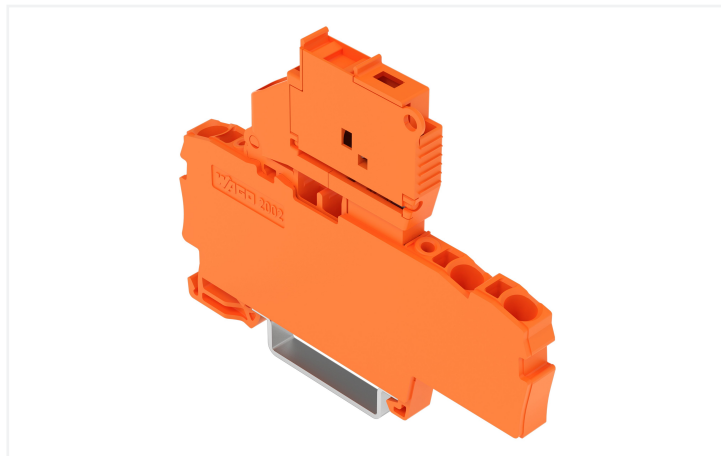

<https://www.wago.com/2002-1712/1000-867>

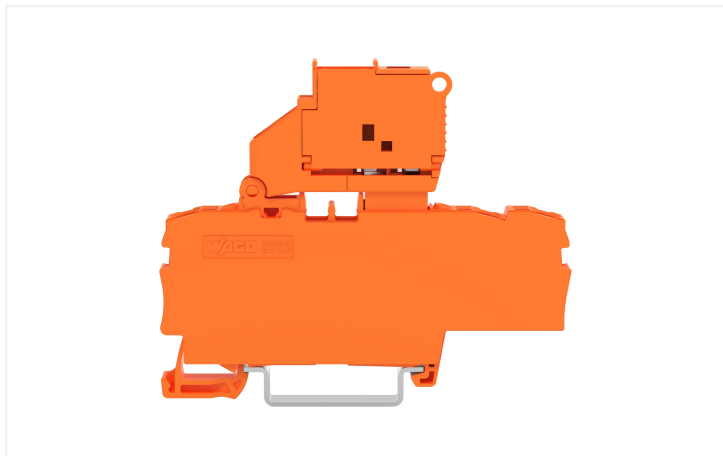

Color: ■ orange

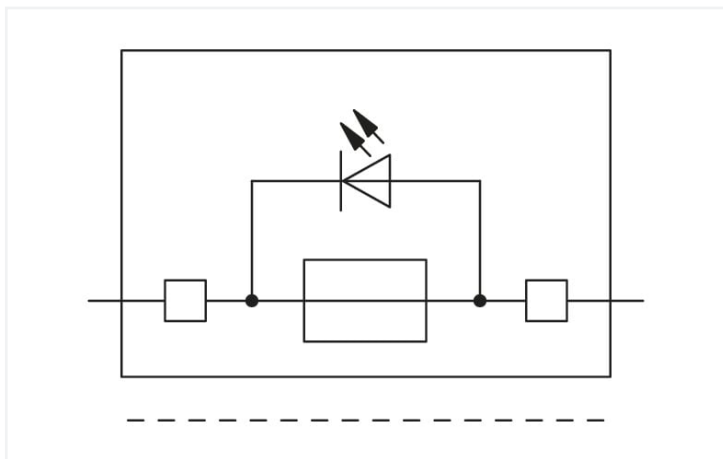

Electrical data

Ratings per	IEC/EN 60947-7-3		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	250 V	-	-
Rated surge voltage	6 kV	-	-
Rated current	6.3 A	-	-

Approvals per	CSA 22.2 No 158		
Use group	B	C	D
Rated voltage	250 V	250 V	-
Rated current	6.3 A	6.3 A	-

Approvals per	UL 1059		
Use group	B	C	D
Rated voltage	120 V	120 V	120 V
Rated current	10 A	10 A	10 A

Ex information	
Reference hazardous areas	See "Downloads – Documentation – Additional Information: Technical Section; Technical Explanations"
Ratings per	ATEX: KIWA 17 ATEX 0030 U / IECEx: KIWA 17.0014U (Ex ec IIC Gc)
Rated voltage EN (Ex e II)	120 V
Rated current (Ex e II)	6.3 A

Power Loss

Power loss (max.) $P_{I(max)}$ (note)	When selecting glass cartridge fuses, make sure that the maximum power loss listed below is not exceeded. The power loss is determined according to IEC or EN 60947-7-3/VDE 0611-6 at 23°C. The temperature rise of the terminal block must be checked according to their application and mounting. Higher ambient temperatures represent an additional impact on miniature fuses. Therefore, in such applications, the rated current must be reduced if necessary. More details are available from the manufacturers.
Power loss P_I max. overload and short-circuit protection (individual arrangement)	1.6 W
Power loss P_I max. overload and short-circuit protection (group arrangement)	1.6 W
Power loss P_I max. short-circuit protection (individual arrangement)	2.5 W
Power loss P_I max. short-circuit protection (group arrangement)	2.5 W

General information

Fuse receptacle	pivoting
Fuse type	Cylindrical fuse; 5 x 20 mm

Connection data

Connection points	3
Total number of potentials	1
Number of levels	1
Number of jumper slots	2

Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross-section	2.5 mm ²
Solid conductor	0.25 ... 4 mm ² / 22 ... 12 AWG
Solid conductor; push-in termination	0.75 ... 4 mm ² / 18 ... 12 AWG
Fine-stranded conductor	0.25 ... 4 mm ² / 22 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 2.5 mm ² / 22 ... 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1 ... 2.5 mm ² / 18 ... 14 AWG
Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.
Strip length	10 ... 12 mm / 0.39 ... 0.47 inches
Wiring direction	Front-entry wiring

Physical data

Width	6.2 mm / 0.244 inches
Height	76.8 mm / 3.024 inches
Depth from upper-edge of DIN-rail	57.6 mm / 2.268 inches

Mechanical data

Mounting type	DIN-35 rail
Marking level	Center/side marking

Material data

Note (material data)	Information on material specifications can be found here
Color	orange
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.252 MJ
Weight	14.9 g

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data

PU (SPU)	50 pcs
Country of origin	CN
GTIN	4066966312799
Customs tariff number	85369095000

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a) 7(c)-I
SCIP notification number (Austria)	a481d6de-7c6e-4659-9542-470a89a30d09
SCIP notification number (Belgium)	af54bc9f-08ce-4556-bfba-a9e7ac63cce0
SCIP notification number (Bulgaria)	464c91e3-20c0-450e-a1b7-48889698275c
SCIP notification number (Czech Republic)	402000df-9cfa-4838-b1d8-be2aae1bbd36
SCIP notification number (Denmark)	d819be5b-a6dc-4617-94ac-54ea005c6ed5
SCIP notification number (Finland)	7e7ce2dd-b34d-427b-b564-ee71a2ad8d3
SCIP notification number (France)	c46a3130-ce30-4fd1-829e-67911965186f
SCIP notification number (Germany)	3d0d03dd-e83c-4088-ae8b-98a37e8e5aa3
SCIP notification number (Hungary)	1e4e57fb-6e5a-41dc-9759-e07386537517
SCIP notification number (Italy)	59de80a7-122a-4398-b936-fd94e1f6f68f
SCIP notification number (Netherlands)	d4212eec-22b2-4056-8e83-506a4df71115
SCIP notification number (Poland)	e58deb74-9442-4ac4-bd30-d3ab32480430
SCIP notification number (Romania)	4cfabb59-d5ee-47fc-ab40-4aad56afcf31
SCIP notification number (Sweden)	45bb36af-3134-464d-9baa-6f1075cc4ec0

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 2002-1712/1000-867	↓

Documentation

Additional Information	
Technical Section	pdf 2240.62 KB ↓

CAD/CAE-Data

CAD data	
2D/3D Models 2002-1712/1000-867	↓

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



Item No.: 209-191
Separator for Ex e/Ex i applications; 3 mm thick; 120 mm wide; orange

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories



Item No.: 210-196
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



Item No.: 210-198
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



Item No.: 210-508
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored



Item No.: 210-197
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



Item No.: 210-506
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored



Item No.: 210-114
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



Item No.: 210-118
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



Item No.: 210-115
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



Item No.: 210-112
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



Item No.: 210-504
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored



Item No.: 210-113
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



Item No.: 210-505
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

1.2.2 End plate

1.2.2.1 End plate



Item No.: 2002-991

End plate for fuse terminal blocks; 2 mm thick; gray



Item No.: 2002-992

End plate for fuse terminal blocks; 2 mm thick; orange

1.2.3 Ferrule

1.2.3.1 Ferrule



Item No.: 216-241

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



Item No.: 216-242

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-262

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-243

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-263

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-244

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



Item No.: 216-264

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



Item No.: 216-246

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



Item No.: 216-266

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

1.2.4 Installation

1.2.4.1 Cover



Item No.: 709-156

Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

1.2.4.2 Cover carrier



Item No.: 709-169

Cover carrier; Type 3; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

1.2.5 Insulation stop

1.2.5.1 Insulation stop



Item No.: 2002-171

Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray



Item No.: 2002-172

Insulation stop; 0.75 - 1 mm²; 5 pieces/strip; dark gray

1.2.6 Jumper

1.2.6.1 Jumper



Item No.: 2004-406/020-000

Delta jumper; insulated; light gray



Item No.: 2004-410

Jumper; 10-way; insulated; light gray



Item No.: 2004-402

Jumper; 2-way; insulated; light gray



Item No.: 2004-403

Jumper; 3-way; insulated; light gray



Item No.: 2004-404

Jumper; 4-way; insulated; light gray



Item No.: 2004-405

Jumper; 5-way; insulated; light gray



Item No.: 2004-406

Jumper; 6-way; insulated; light gray



Item No.: 2004-407

Jumper; 7-way; insulated; light gray



Item No.: 2004-408

Jumper; 8-way; insulated; light gray



Item No.: 2004-409

Jumper; 9-way; insulated; light gray



Item No.: 2004-440

Jumper; from 1 to 10; insulated; light gray



Item No.: 2004-433

Jumper; from 1 to 3; insulated; light gray



Item No.: 2004-434

Jumper; from 1 to 4; insulated; light gray



Item No.: 2004-435

Jumper; from 1 to 5; insulated; light gray



Item No.: 2004-436

Jumper; from 1 to 6; insulated; light gray



Item No.: 2004-437

Jumper; from 1 to 7; insulated; light gray



Item No.: 2004-438

Jumper; from 1 to 8; insulated; light gray



Item No.: 2004-439

Jumper; from 1 to 9; insulated; light gray



Item No.: 2004-405/011-000

Star point jumper; 3-way; insulated; light gray



Item No.: 210-103

Wire commoning chain; insulated; black



Item No.: 210-123

Wire commoning chain; insulated; blue

1.2.7 Locking system

1.2.7.1 Locking system



Item No.: 210-254

Interlocking link; mechanically locks multiple links; 1 m long; transparent

1.2.8 Marking

1.2.8.1 Group marker carrier



Item No.: 2009-191

Group marker carrier; gray

Item No.: 2009-192

Group marker carrier; gray

Item No.: 2009-193

Group marker carrier; gray

1.2.8.2 Marker

Item No.: 2009-145/000-006

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

Item No.: 2009-145/000-007

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

Item No.: 2009-145/000-023

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

Item No.: 2009-145/000-012

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

Item No.: 2009-145/000-005

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

Item No.: 2009-145/000-024

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Item No.: 2009-145

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 2009-145/000-002

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



Item No.: 248-501/000-006

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

Item No.: 248-501/000-007

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

Item No.: 248-501/000-023

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

Item No.: 248-501/000-017

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green



Item No.: 248-501/000-012

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

Item No.: 248-501/000-005

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

Item No.: 248-501/000-024

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

Item No.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 248-501/000-002

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

Item No.: 793-5501/000-006

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue

Item No.: 793-5501/000-014

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown

Item No.: 793-5501/000-007

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 793-5501/000-023

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green

Item No.: 793-5501/000-017

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green

Item No.: 793-5501/000-012

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange

Item No.: 793-5501/000-005

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red



Item No.: 793-5501/000-024

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Item No.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 793-5501/000-002

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

Item No.: 2009-115/000-006

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 2009-115/000-007

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

Item No.: 2009-115/000-023

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

Item No.: 2009-115/000-017

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green

Item No.: 2009-115/000-012

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-115/000-005

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

Item No.: 2009-115/000-024

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 2009-115/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

1.2.8.3 Marker carrier



Item No.: 2009-198

Adaptor; gray

1.2.8.4 Marking strip



Item No.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.2.9 Protective warning marker

1.2.9.1 Cover



Item No.: 2002-115

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.2.10 Screwless end stop

1.2.10.1 Mounting accessories



Item No.: 249-117

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.2.11 Test and measurement

1.2.11.1 Testing accessories



Item No.: 210-136

Test plug; 2 mm Ø; with 500 mm cable; red

1.2.12 Tool

1.2.12.1 Operating tool



Item No.: 210-658

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured




Item No.: 210-720


Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes


Conductor termination




All conductor types at a glance




Push-in termination of solid and ferruled conductors



Inserting a conductor via push-in termination:
Solid conductors with cross-sections from either one size above, or up to two sizes below, the rated cross-section can be simply pushed in – no tools needed.




Inserting a conductor via operating tool:
Connecting fine-stranded conductors without ferrules, or small cross-sectional conductors that cannot be pushed in, is performed similarly to the original CAGE CLAMP® – just use an operating tool.
Advantage:
To open the clamp, the operating tool is inserted vertically. The conductor entry is less than 15 degrees for easier wiring.




Conductor termination – insulation stop

Commoning




Insert push-in type jumper bar and push down until it hits backstop.



Removing a push-in type jumper bar:
Insert the operating tool between the jumper and partition wall of the dual jumper slots, then lift up the jumper.
Place the operating tool in the center of jumpers for up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.






Fuse terminal blocks with a width of 6.2 mm/0.244 in can be assembled adjacently. If there is no adjacent fuse terminal block at the end of the assembly, an end plate must be used.



Fused Disconnect Terminal Block with a Pivoting Fuse Holder
Pivot the fuse holder into the locked open position.

Fused disconnect terminal block with a pivoting fuse holder
Fuse replacement



Information from the mini-automotive, blade-type fuse manufacturers

Standard	%	F_T
15	14	0.877
15	15	0.884
15	17	0.893
15	20	0.903
15	25	0.914
15	30	0.926
15	35	0.938
15	40	0.951
15	45	0.964
15	50	0.977
15	60	1.000
15	75	1.050
15	100	1.100
15	125	1.150
15	150	1.200
15	200	1.333
15	250	1.500
15	300	1.667
15	400	2.222
15	500	2.778
15	600	3.333
15	800	4.444
15	1000	5.556
15	1250	6.944
15	1500	8.333
15	2000	11.111
15	2500	13.889
15	3000	16.667
15	4000	22.222
15	5000	27.778
15	6000	33.333
15	8000	44.444
15	10000	55.556
15	12500	69.444
15	15000	83.333
15	20000	111.111
15	25000	138.889
15	30000	166.667
15	40000	222.222
15	50000	277.778
15	60000	333.333
15	80000	444.444
15	100000	555.556
15	125000	694.444
15	150000	833.333
15	200000	1111.111
15	250000	1388.889
15	300000	1666.667
15	400000	2222.222
15	500000	2777.778
15	600000	3333.333
15	800000	4444.444
15	1000000	5555.556
15	1250000	6944.444
15	1500000	8333.333
15	2000000	11111.111
15	2500000	13888.889
15	3000000	16666.667
15	4000000	22222.222
15	5000000	27777.778
15	6000000	33333.333
15	8000000	44444.444
15	10000000	55555.556
15	12500000	69444.444
15	15000000	83333.333
15	20000000	111111.111
15	25000000	138888.889
15	30000000	166666.667
15	40000000	222222.222
15	50000000	277777.778
15	60000000	333333.333
15	80000000	444444.444
15	100000000	555555.556
15	125000000	694444.444
15	150000000	833333.333
15	200000000	1111111.111
15	250000000	1388888.889
15	300000000	1666666.667
15	400000000	2222222.222
15	500000000	2777777.778
15	600000000	3333333.333
15	800000000	4444444.444
15	1000000000	5555555.556
15	1250000000	6944444.444
15	1500000000	8333333.333
15	2000000000	11111111.111
15	2500000000	13888888.889
15	3000000000	16666666.667
15	4000000000	22222222.222
15	5000000000	27777777.778
15	6000000000	33333333.333
15	8000000000	44444444.444
15	10000000000	55555555.556
15	12500000000	69444444.444
15	15000000000	83333333.333
15	20000000000	111111111.111
15	25000000000	138888888.889
15	30000000000	166666666.667
15	40000000000	222222222.222
15	50000000000	277777777.778
15	60000000000	333333333.333
15	80000000000	444444444.444
15	100000000000	555555555.556
15	125000000000	694444444.444
15	150000000000	833333333.333
15	200000000000	1111111111.111
15	250000000000	1388888888.889
15	300000000000	1666666666.667
15	400000000000	2222222222.222
15	500000000000	2777777777.778
15	600000000000	3333333333.333
15	800000000000	4444444444.444
15	1000000000000	5555555555.556
15	1250000000000	6944444444.444
15	1500000000000	8333333333.333
15	2000000000000	11111111111.111
15	2500000000000	13888888888.889
15	3000000000000	16666666666.667
15	4000000000000	22222222222.222
15	5000000000000	27777777777.778
15	6000000000000	33333333333.333
15	8000000000000	44444444444.444
15	10000000000000	55555555555.556
15	12500000000000	69444444444.444
15	15000000000000	83333333333.333
15	20000000000000	111111111111.111
15	25000000000000	138888888888.889
15	30000000000000	166666666666.667
15	40000000000000	222222222222.222
15	50000000000000	277777777777.778
15	60000000000000	333333333333.333
15	80000000000000	444444444444.444
15	100000000000000	555555555555.556
15	125000000000000	694444444444.444
15	150000000000000	833333333333.333
15	200000000000000	1111111111111.111
15	250000000000000	1388888888888.889
15	300000000000000	1666666666666.667
15	400000000000000	2222222222222.222
15	500000000000000	2777777777777.778
15	600000000000000	3333333333333.333
15	800000000000000	4444444444444.444
15	1000000000000000	5555555555555.556
15	1250000000000000	6944444444444.444
15	1500000000000000	8333333333333.333
15	2000000000000000	11111111111111.111
15	2500000000000000	13888888888888.889
15	3000000000000000	16666666666666.667
15	4000000000000000	22222222222222.222
15	5000000000000000	27777777777777.778
15	6000000000000000	33333333333333.333
15	8000000000000000	44444444444444.444
15	10000000000000000	55555555555555.556
15	12500000000000000	69444444444444.444
15	15000000000000000	83333333333333.333
15	20000000000000000	111111111111111.111
15	25000000000000000	138888888888888.889
15	30000000000000000	166666666666666.667
15	40000000000000000	222222222222222.222
15	50000000000000000	277777777777777.778
15	60000000000000000	333333333333333.333
15	80000000000000000	444444444444444.444
15	100000000000000000	555555555555555.556
15	125000000000000000	694444444444444.444
15	150000000000000000	833333333333333.333
15	200000000000000000	1111111111111111.111
15	250000000000000000	1388888888888888.889
15	300000000000000000	1666666666666666.667
15	400000000000000000	2222222222222222.222
15	500000000000000000	2777777777777777.778
15	600000000000000000	3333333333333333.333
15	800000000000000000	4444444444444444.444
15	1000000000000000000	5555555555555555.556
15	1250000000000000000	6944444444444444.444
15	1500000000000000000	8333333333333333.333
15	2000000000000000000	11111111111111111.111
15	2500000000000000000	13888888888888888.889
15	3000000000000000000	16666666666666666.667
15	4000000000000000000	22222222222222222.222
15	5000000000000000000	27777777777777777.778
15	6000000000000000000	33333333333333333.333
15	8000000000000000000	44444444444444444.444
15	10000000000000000000	55555555555555555.556
15	12500000000000000000	69444444444444444.444
15	15000000000000000000	83333333333333333.333
15	20000000000000000000	111111111111111111.111
15	25000000000000000000	138888888888888888.889
15	30000000000000000000	166666666666666666.667
15	40000000000000000000	222222222222222222.222
15	50000000000000000000	277777777777777777.778
15	60000000000000000000	333333333333333333.333
15	80000000000000000000	444444444444444444.444
15	100000000000000000000	555555555555555555.556
15	125000000000000000000	694444444444444444.444
15	150000000000000000000	833333333333333333.333
15	200000000000000000000	1111111111111111111.111
15	250000000000000000000	1388888888888888888.889
15	300000000000000000000	1666666666666666666.667
15	400000000000000000000	2222222222222222222.222
15	500000000000000000000	2777777777777777777.778
15	600000000000000000000	3333333333333333333.333
15	800000000000000000000	4444444444444444444.444
15	1000000000000000000000	5555555555555555555.556
15	1250000000000000000000	6944444444444444444.444
15	1500000000000000000000	8333333333333333333.333
15	2000000000000000000000	11111111111111111111.111
15	2500000000000000000000	13888888888888888888.889
15	3000000000000000000000	16666666666666666666.667
15	4000000000000000000000	22222222222222222222.222
15	5000000000000000000000	27777777777777777777.778
15	6000000000000000000000	33333333333333333333.333
15	8000000000000000000000	44444444444444444444.444
15	10000000000000000000000	55555555555555555555.556
15	12500000000000000000000	69444444444444444444.444
15	15000000000000000000000	83333333333333333333.333
15	20000000000000000000000	111111111111111111111.111
15	25000000000000000000000	138888888888888888888.889
15	30000000000000000000000	166666666666666666666.667
15	40000000000000000000000	222222222222222222222.222
15	50000000000000000000000	277777777777777777777.778
15	60000000000000000000000	333333333333333333333.333
15	80000000000000000000000	444444444444444444444.444
15	100000000000000000000000	555555555555555555555.556
15	125000000000000000000000	694444444444444444444.444
15	150000000000000000000000	833333333333333333333.333
15	200000000000000000000000	1111111111111111111111.111
15	250000000000000000000000	1388888888888888888888.889
15	300000000000000000000000	1666666666666666666666.667
15	400000000000000000000000	2222222222222222222222.222
15	500000000000000000000000	2777777777777777777777.778