

# Product data sheet Spirotech

## Product name

**SpiroCross -DN200 -Flange**

## Product properties

A steel hydraulic separator with (microbubble) deaerator and dirt separator with a DN50 - DN300 PN16 flange connection

- Three functions in a single component
- Just four connections instead of eight
- Optimal hydraulic balance between primary and secondary pumps
- SpiroTube guarantees minimal fluid mixing and thus the best temperature differential
- Applicable with 50/50 Ethylene Glycol / Water (Volume)
- Real, active deaeration and dirt separation
- Even the tiniest air bubbles and dirt particles are separated and removed
- Constant low pressure drop
- Compact design and limited build height, thanks to the SpiroTube
- PN16 flange connections
- Connection diameters from DN50 - DN300, larger connection diameters on request
- Exceptional guarantee


## Article number

**XC200F**

## Product image



## Product dimensions

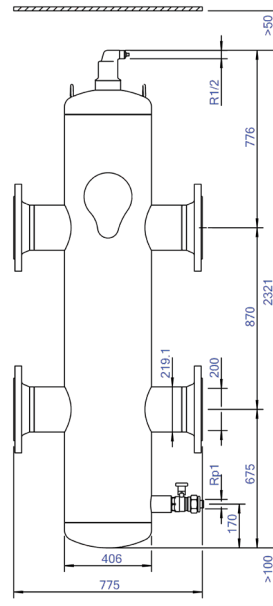

# Product data sheet Spirotech

## ETIM product data

Max. operating pressure	10 bar
Material	Steel
Max. medium temperature (continuous)	110 °C
Suitable for cooling	Yes
Surface protection	Lacquered
Primary connection	Flange
Nominal diameter primary connection	DN 200
Secondary connection	Flange
Nominal diameter secondary connection	DN 200
With drain connection	Yes
With thermal insulation	No
Nominal diameter drain connection	1 inch

With thermometer	None
With pressure gauge	None
With shut of valve	None
With dirt separator	At the primary return pipe
With magnetite separator	None
Dosing point for solid or liquid cleaning additives	No
Suitable for glycol	Yes
Suitable for ethanol	Yes
Number of boiler connections	2
Number of air-release connections	1
Nominal diameter air-release	1/2 inch internal thread

### Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website

