


## Data Sheet | Item Number: 236-757/332-000

Stackable PCB terminal block; 2.5 mm<sup>2</sup>; Pin spacing 7.5/7.62 mm; 1-pole; CAGE CLAMP®; commoning option; light green

<https://www.wago.com/236-757/332-000>




Current-Carrying Capacity Curve  
Pin spacing: 5 mm / Conductor cross-section: 2.5 mm<sup>2</sup> "f-st"  
Based on: EN 60512-5-2 / Reduction factor: 1

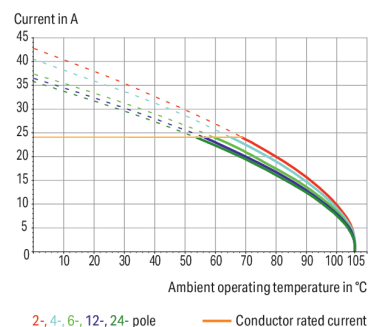

Color: ■ light green

Similar to illustration

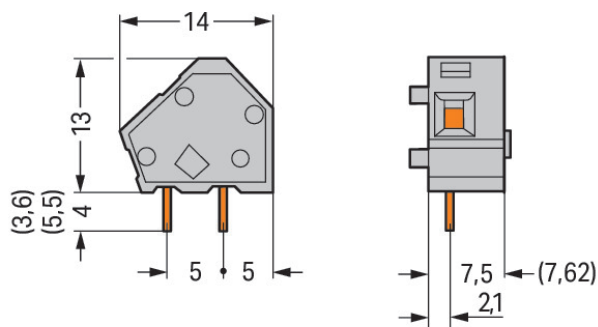

Dimensions in mm

PCB terminal block, 236 Series, light green

Connect conductors quickly and safely with this PCB terminal block (item number 236-757/332-000). It offers the flexibility needed for different mounting types. Conductors can only be connected to this PCB terminal block if their strip length is between 5 and 6 mm. Featuring one conductor terminal along with CAGE CLAMP®, this connector outperforms the competition. Our trusted universal connection known as CAGE CLAMP® leads the way when it comes to connection technology and electrical interconnections. Dimensions: (9.7 x 18.5 x 14) mm (width x height x depth). This PCB terminal block is suitable for conductor cross sections ranging from 0.08 mm<sup>2</sup> to 2.5 mm<sup>2</sup>.

Tin is used for coating the contact surfaces. This PCB terminal block is operated with an operating tool. The PCB terminal block is designed for THT soldering. The conductor is designed to be inserted into the board at a 45° angle..



| Notes     |                                                                                                                                                                                                                                                         |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Variants: | Versions for Ex e II and Ex i<br>Solder pin length: 3.6 mm<br>Solder pin length: 5.5 mm<br>Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . |

| Electrical data                 |  |                |       |        |
|---------------------------------|--|----------------|-------|--------|
| Ratings per                     |  | IEC/EN 60664-1 |       |        |
| Overvoltage category            |  | III            | III   | II     |
| Pollution degree                |  | 3              | 2     | 2      |
| Nominal voltage                 |  | 400 V          | 630 V | 1000 V |
| Rated impulse withstand voltage |  | 6 kV           | 6 kV  | 6 kV   |
| Rated current                   |  | 24 A           | 24 A  | 24 A   |
| Approvals per                   |  | UL 1059        |       |        |
| Use group                       |  | B              | C     | D      |
| Rated voltage                   |  | 300 V          | -     | 300 V  |
| Rated current                   |  | 15 A           | -     | 10 A   |

| Approvals per |  | CSA   |   |       |
|---------------|--|-------|---|-------|
| Use group     |  | B     | C | D     |
| Rated voltage |  | 300 V | - | 300 V |
| Rated current |  | 15 A  | - | 10 A  |

| Connection data            |   |
|----------------------------|---|
| Clamping units             | 1 |
| Total number of potentials | 1 |
| Number of connection types | 1 |
| Number of levels           | 1 |

| Connection 1                                      |                                  |
|---------------------------------------------------|----------------------------------|
| Connection technology                             | CAGE CLAMP®                      |
| Actuation type                                    | Operating tool                   |
| Solid conductor                                   | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
| Fine-stranded conductor                           | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
| Fine-stranded conductor; with insulated ferrule   | 0.25 ... 1.5 mm²                 |
| Fine-stranded conductor; with uninsulated ferrule | 0.25 ... 1.5 mm²                 |
| Note (conductor cross-section)                    | 12 AWG: THHN, THWN               |
| Strip length                                      | 5 ... 6 mm / 0.2 ... 0.24 inches |
| Conductor connection direction to PCB             | 45 °                             |
| Pole number                                       | 1                                |

| Physical data                        |                                |
|--------------------------------------|--------------------------------|
| Pin spacing                          | 7.5/7.62 mm / 0.295/0.3 inches |
| Width                                | 9.7 mm / 0.382 inches          |
| Height                               | 18.5 mm / 0.728 inches         |
| Height from the surface              | 13 mm / 0.512 inches           |
| Depth                                | 14 mm / 0.551 inches           |
| Solder pin length                    | 5.5 mm                         |
| Solder pin dimensions                | 0.7 x 0.7 mm                   |
| Drilled hole diameter with tolerance | 1.1 (+0.1) mm                  |



| PCB contact                         |                                     |
|-------------------------------------|-------------------------------------|
| PCB contact                         | THT                                 |
| Solder pin arrangement              | within the terminal block (in-line) |
| Number of solder pins per potential | 2                                   |

| Material data                      |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | light green                                                              |
| Material group                     | I                                                                        |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Flammability class per UL94        | V0                                                                       |
| Clamping spring material           | Chrome-nickel spring steel (CrNi)                                        |
| Contact material                   | Electrolytic copper (E <sub>cu</sub> )                                   |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 0.018 MJ                                                                 |
| Weight                             | 1.1 g                                                                    |

| Environmental requirements |                 |
|----------------------------|-----------------|
| Limit temperature range    | -60 ... +105 °C |

| Commercial data       |                                |
|-----------------------|--------------------------------|
| Product Group         | 4 (Printed Circuit Connectors) |
| PU (SPU)              | 400 (100) pcs                  |
| Packaging type        | Box                            |
| Country of origin     | CH                             |
| GTIN                  | 4044918784269                  |
| Customs tariff number | 85369010000                    |

| Product Classification |                      |
|------------------------|----------------------|
| UNSPSC                 | 39121409             |
| eCl@ss 10.0            | 27-44-04-01          |
| eCl@ss 9.0             | 27-44-04-01          |
| ETIM 9.0               | EC002643             |
| ETIM 10.0              | EC002643             |
| ECCN                   | NO US CLASSIFICATION |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

| Approvals / Certificates                                                           |               |                  |                                                                                     |           |                  |
|------------------------------------------------------------------------------------|---------------|------------------|-------------------------------------------------------------------------------------|-----------|------------------|
| General approvals                                                                  |               |                  | Approvals for marine applications                                                   |           |                  |
|  |               |                  |  |           |                  |
| Approval                                                                           | Standard      | Certificate Name | Approval                                                                            | Standard  | Certificate Name |
| CSA<br>DEKRA Certification B.V.                                                    | C22.2 No. 158 | 1673957          | BV<br>Bureau Veritas S.A.                                                           | IEC 60998 | 11915/E0 BV      |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance

236-757/332-000

↓

Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB

↓

Gebrückte Klemmen-leisten für Leiterplatten

pdf

303.71 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models

236-757/332-000

↓

CAE data

EPLAN Data Portal

236-757/332-000

↓

ZUKEN Portal

236-757/332-000

↓

PCB Design

Symbol and Footprint via SamacSys

236-757/332-000

↓

Symbol and Footprint via Ultra Librarian

236-757/332-000

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



Item No.: 236-850

End plate; 1 mm thick; snap-fit type; black



Item No.: 236-400

End plate; 1 mm thick; snap-fit type; blue



Item No.: 236-200

End plate; 1 mm thick; snap-fit type; dark gray



Item No.: 236-100

End plate; 1 mm thick; snap-fit type; gray



Item No.: 236-500

End plate; 1 mm thick; snap-fit type; green



Item No.: 236-300

End plate; 1 mm thick; snap-fit type; light gray



Item No.: 236-700

End plate; 1 mm thick; snap-fit type; light green



Item No.: 236-600

End plate; 1 mm thick; snap-fit type; orange



Item No.: 236-800

End plate; red



1.2 Optional Accessories

1.2.1 Ferrule

1.2.1.1 Ferrule

|                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow                                                                         | <br><b>Item No.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow                                                                       | <br><b>Item No.: 216-151</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated                                                                                          | <br><b>Item No.: 216-131</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated; silver-colored                                                               |
| <br><b>Item No.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise                                                                | <br><b>Item No.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise                                                              | <br><b>Item No.: 216-132</b><br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated                                                                                          | <br><b>Item No.: 216-152</b><br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated                                                                               |
| <br><b>Item No.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; acc. to DIN 46228, Part 4/09.90; white                     | <br><b>Item No.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | <br><b>Item No.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white                                                                                      | <br><b>Item No.: 216-141</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92        |
| <br><b>Item No.: 216-101</b><br>Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored                                                                | <br><b>Item No.: 216-121</b><br>Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored                                                              | <br><b>Item No.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray              | <br><b>Item No.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray   |
| <br><b>Item No.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                         | <br><b>Item No.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                       | <br><b>Item No.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92                | <br><b>Item No.: 216-102</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored                                                             |
| <br><b>Item No.: 216-122</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored                                                             | <br><b>Item No.: 216-243</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red   | <br><b>Item No.: 216-263</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red                | <br><b>Item No.: 216-203</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                             |
| <br><b>Item No.: 216-223</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                             | <br><b>Item No.: 216-103</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated                                                                              | <br><b>Item No.: 216-143</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92                   | <br><b>Item No.: 216-123</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; silver-colored                                                                |
| <br><b>Item No.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black                                                                         | <br><b>Item No.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black                                                                       | <br><b>Item No.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black            | <br><b>Item No.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black |
| <br><b>Item No.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <br><b>Item No.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated                                                                            | <br><b>Item No.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored | <br><b>Item No.: 216-104</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; silver-colored                                                              |

1.2.2 Marking

1.2.2.1 Marking strip



**Item No.: 210-332/750-020**  
Marking strips; as a DIN A4 sheet; MARKED; 1-20 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white

**Item No.: 210-332/762-020**  
Marking strips; as a DIN A4 sheet; MARKED; 1-20 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white

1.2.3 Stickers with operating instructions

1.2.3.1 Stickers with operating instructions



**Item No.: 210-191**  
Stickers for operating instructions; for PCB terminal blocks; 236 Series

1.2.4 Test and measurement

1.2.4.1 Testing accessories



**Item No.: 231-161**  
Testing plug module with contact stud; for 236 Series; Pin spacing 7.5 mm / 0.295 in; 2,50 mm²; gray

**Item No.: 231-125**  
Testing plug module with contact stud; Pin spacing 7.62 mm / 0.3 in; 2,50 mm²; orange

1.2.5 Tool

1.2.5.1 Operating tool



**Item No.: 210-658**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured

**Item No.: 210-720**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

**Item No.: 210-657**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured



**Item No.: 236-335**  
Operating tool; gray



**Item No.: 236-332**  
Operating tool; natural

Installation Notes

Conductor termination



Inserting a conductor via 3.5 mm screwdriver.  
Screwdriver actuation parallel to conductor entry

Inserting a conductor via 3.5 mm screwdriver.  
Screwdriver actuation perpendicular to conductor entry

Inserting a conductor via operating tool.

Compared to standard screwdrivers, these operating tools are far more convenient for wiring PCB terminal strips at factory.

Installation



PCB Terminal Strips placed behind each other save space – staggering them by half the pin spacing simplifies subsequent wiring of the first row.

Installation



Combining PCB terminal blocks with different pin spacing.

Marking



Optional: Labeling via factory direct marking.



Optional: Labeling with self-adhesive marking strips possible