



## Henco Pro-Fit

Telescopic coupling



# Henco Pro-Fit

Meet the very first **telescopic coupling** based on the Henco Pro-Fit push-fit solution.

The Henco Pro-fit Telescopic coupling lets you take advantage of the following features:

 **Quick installation**

- No pressing machine required

 **Versatile**

- Available for diameter 16 mm and 20 mm

 **Robust yet lightweight**

- Fitting made from high-quality synthetic material

 **Faultless installation**

- No insert required
- Clearly visible control windows with red indicator

 **Easy to embed**

- Fitting does not need to be taped in, it only needs to be fitted with concrete caps to prevent concrete water seeping in.



This telescopic coupling ensures **two Henco multilayer pipes with the same diameter can be connected to each other**. In addition, the distance between the two pipes does not have to be taken into account exactly during installation because the fitting is extendable. Once the desired length has been reached, the distance can be fixed by hand-tightening the swivel up to the stop line.



## General technical information




### Type: 53HPK


Henco Pro-Fit telescopic coupling

Article number	Size	Maximum distance between 2 tubes	Bag/box
53HPK-16	16 mm x 16 mm	188 mm	5 pcs. / 50 pcs.
53HPK-20	20 mm x 20 mm	187 mm	5 pcs. / 40 pcs.

#### 53HPK-16

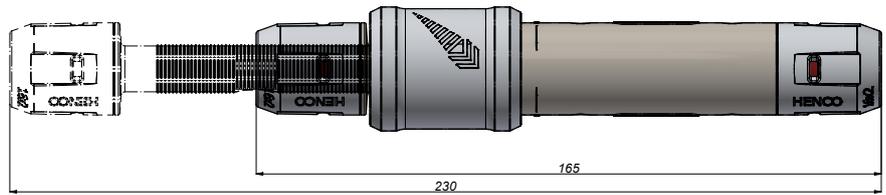

#### 53HPK-20

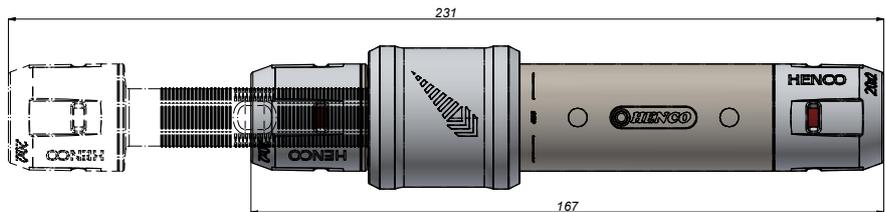

### Type: HPK-BK




Concrete cap for Henco Pro-Fit to prevent concrete moisture seeping in

Article number		Bag
HPK-BK16	Concrete cap for Henco Pro-Fit series 16 mm	10 pcs.
HPK-BK20	Concrete cap for Henco Pro-Fit series 20 mm	10 pcs.





# We care to connect

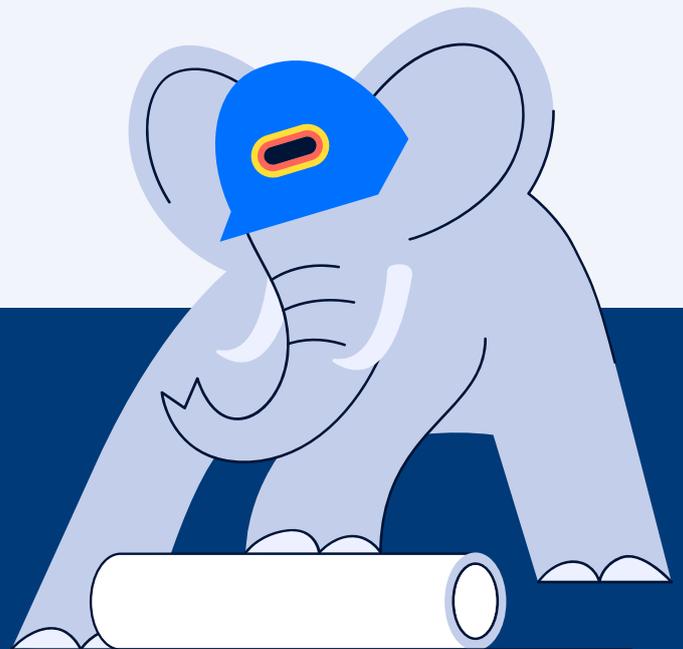

## MyHenco

The best of Henco **always at hand.**



Register now  
**for free.**