



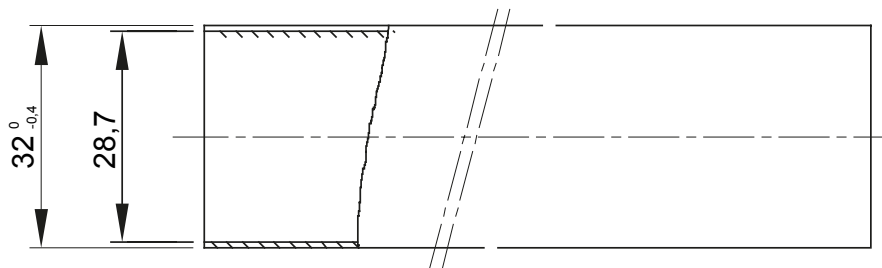

Light rigid conduits RK9 range, made of PVC, classification 22211, available in the following versions: 2 m length, grey RAL 7035 colour and five diameters, from 16 to 40 mm with sleeved end; 3 m length, grey RAL 7035 colour and six diameters, from 16 to 50 mm with straight end or sleeved end; 3 m length, white RAL 9010 colour and five diameters, from 16 to 40 mm with straight end. Suitable for electrical and/or data transmission systems and to be installed in uncrowded areas. They represent the best solution for those who do not require a high impact resistance but at the same time do not want to compromise on quality. They can be integrated with spiraled sheaths and wall mounting enclosures. Completing the offer, a wide range of accessories and routing components from IP40 to IP67 protection rating. The RK9 conduits comply with Product Standard EN 61386-1 and EN 61386-21.

|                                                                 |                                                |                                                                 |                                           |
|-----------------------------------------------------------------|------------------------------------------------|-----------------------------------------------------------------|-------------------------------------------|
| Colour                                                          | Grey RAL 7035                                  | Material                                                        | PVC                                       |
| Length (m)                                                      | 2                                              | Conduits Ø (mm)                                                 | 32                                        |
| Glow Wire Test                                                  | 960 °C                                         | Resistance to compression                                       | 2 (Light - 320 N)                         |
| Resistance to impact                                            | 2 (Light - 320 N)                              | Resistance to bending                                           | 1 (Rigid)                                 |
| Electrical characteristics                                      | 2 (With electrical insulating characteristics) | Protection against ingress of solid objects without accessories | 0                                         |
| Protection against ingress of water objects without accessories | 0                                              | Resistance against corrosion                                    | Not applicable to plastic conduit systems |
| Fire resistance                                                 | 1 (Non-flame propagating)                      | Protection against ingress of solid objects with accessories    | 40 (depends on the accessories used)      |
| Protection against ingress of water with accessories            | 0 (depends on the accessories used)            | Standard                                                        | EN 61386-1 EN 61386-22                    |
| Family                                                          | RK9                                            | Classification                                                  | 22211                                     |
| Conduit type                                                    | Sleeved                                        |                                                                 |                                           |

## DIMENSIONAL

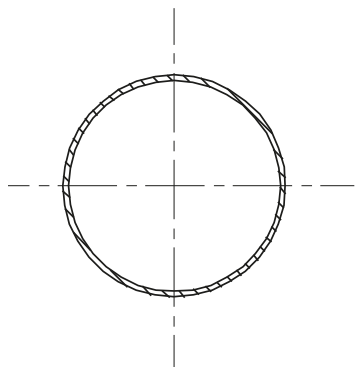

## TECHNICAL SYMBOLOGY



960 °C

## STANDARDS/APPROVALS

