


Start Surface IP66 Ø300mm New  
START SURFACE IP66 1150LM 830 IK10 WHT  
0049928



Product features

- LED exterior surface mounted luminaire, 1150lm, 12W power consumption, 96lm/W efficacy, 3000K color temperature, CRI80, non-dimmable, IP66, IK10, 90,000 hours (L70B50) Lifespan, white housing, vandal resistant, supplied with anti-theft screws

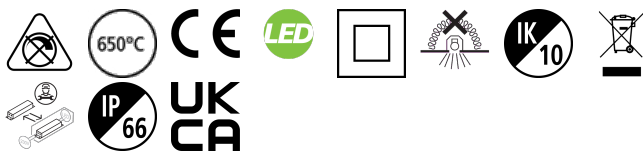


PRODUCT OVERVIEW

|                                   |                                                |
|-----------------------------------|------------------------------------------------|
| Product name                      | START SURFACE IP66 1150LM 830 IK10 WHT         |
| Technology                        | LED                                            |
| Cap/Base                          | N/A                                            |
| Housing                           | PC Polycarbonate                               |
| Mount                             | Ceiling surface mounting, Wall surface mounted |
| Environment                       | Indoor, Outdoor                                |
| General application               | Hospitality                                    |
| ETIM Class                        | EC002892                                       |
| E-number FI                       | 4579599                                        |
| Warranty                          | 5 years                                        |
| Fixture luminous flux (lm)        | 1150                                           |
| Luminaire efficacy (lm/W)         | 96                                             |
| Correlated colour temperature (k) | 3000                                           |
| Light colour                      | Warm White                                     |
| CRI (Ra)                          | 80                                             |
| Colour Variation Initial (SDCM)   | SDCM5                                          |
| Photobiological Risk Group        | RG0                                            |
| Total power consumption (W)       | 12                                             |
| Electrical protection             | Class II                                       |
| Control gear type                 | LED driver constant current                    |
| Dimmable                          | No                                             |
| Dimming method                    | N/A                                            |
| Housing colour                    | RAL 9003 - Signal white                        |
| IP rating                         | IP66                                           |
| IK rating                         | IK10                                           |
| Product EAN number                | 5410288499284                                  |

PHOTOMETRY

Start Surface IP66 Ø300mm New  
START SURFACE IP66 1150LM 830 IK10 WHT  
0049928

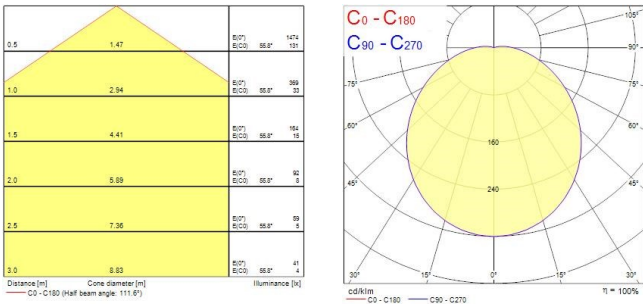

TECHNICAL DRAWINGS

