


## Start Surface IP66 Ø300mm New

START SURFACE IP66 1150LM 830 IK10 BLK  
0049926



### Product features

- LED exterior surface mounted luminaire, 1150lm, 12W power consumption, 96lm/W efficacy, 3000K color temperature, CRI80, non-dimmable, IP66, IK10, 90,000 hours (L70B50) Lifespan, black housing, vandal resistant, supplied with anti-theft screws

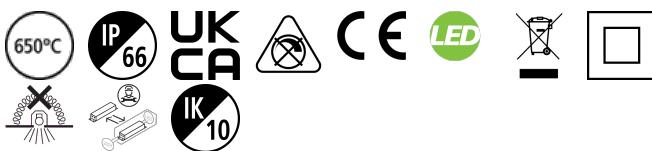


### PRODUCT OVERVIEW

Product name	START SURFACE IP66 1150LM 830 IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579597
Warranty	5 years
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	96
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288499260

### PHOTOMETRY

## Start Surface IP66 Ø300mm New

*START SURFACE IP66 1150LM 830 IK10 BLK*  
0049926

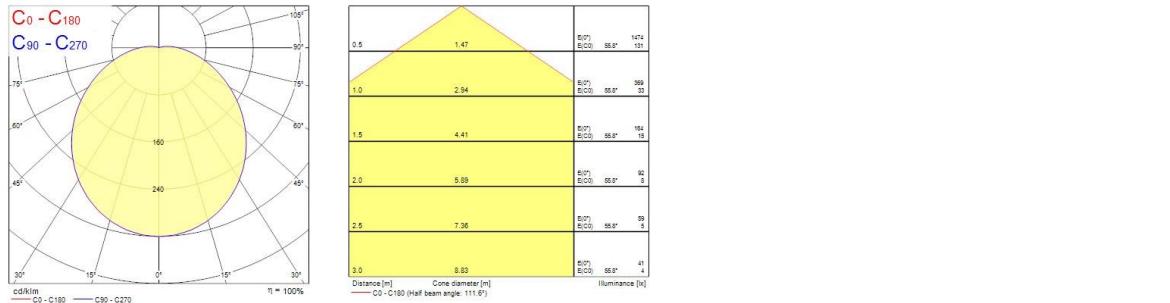

### TECHNICAL DRAWINGS

