

Features

- LED exterior surface mounted luminaire, 1150lm, 12W power consumption, 96lm/W efficacy, 3000K color temperature, CRI80, non-dimmable, IP66, IK10, 90,000 hours (L70B50) Lifespan, black housing, vandal resistant, supplied with anti-theft screws

Product Overview

Product name	START SURFACE IP66 1150LM 830 IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579597
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	96
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	RAL9011

Light your world

START SURFACE IP66 1150LM 830 IK10 BLK 0049926

IP rating

IP66

IK rating

IK10

Product EAN number

5410288499260

Warranty

5 years


Dimming method

N/A

Useful luminous flux (#use)

1150

Photometry

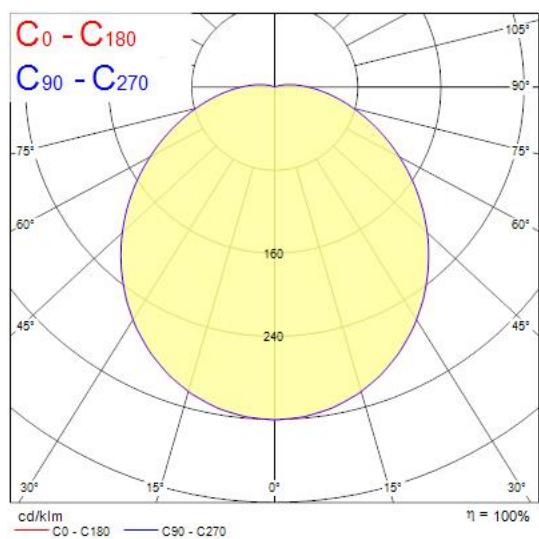

Technical drawings

