


## Start Surface IP66 Ø350mm New

START Surface IP66 900-2950LM 840 IK10 BLK  
0049295



### Product features

- LED exterior surface mounted luminaire, 350mm diameter, 2950lm as max. lumen output, can be adjusted down to 900lm by internal switch, max 24W power consumption, max 133lm/W efficacy, 4000K color temperature, CRI80, non-dimmable, IP66, IK10, 100,000 hours (L70B50) Lifespan, black housing, vandal resistant, supplied with anti-theft screws

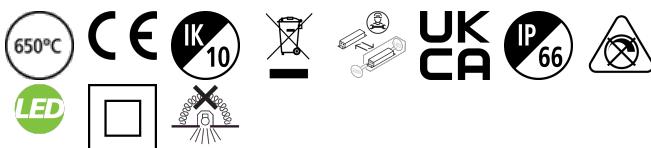


### PRODUCT OVERVIEW

Product name	START Surface IP66 900-2950LM 840 IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579596
Warranty	5 years
Fixture luminous flux (lm)	2950
Luminaire efficacy (lm/W)	123
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492957

### PHOTOMETRY



## Start Surface IP66 Ø350mm New

START Surface IP66 900-2950LM 840 IK10 BLK  
0049295

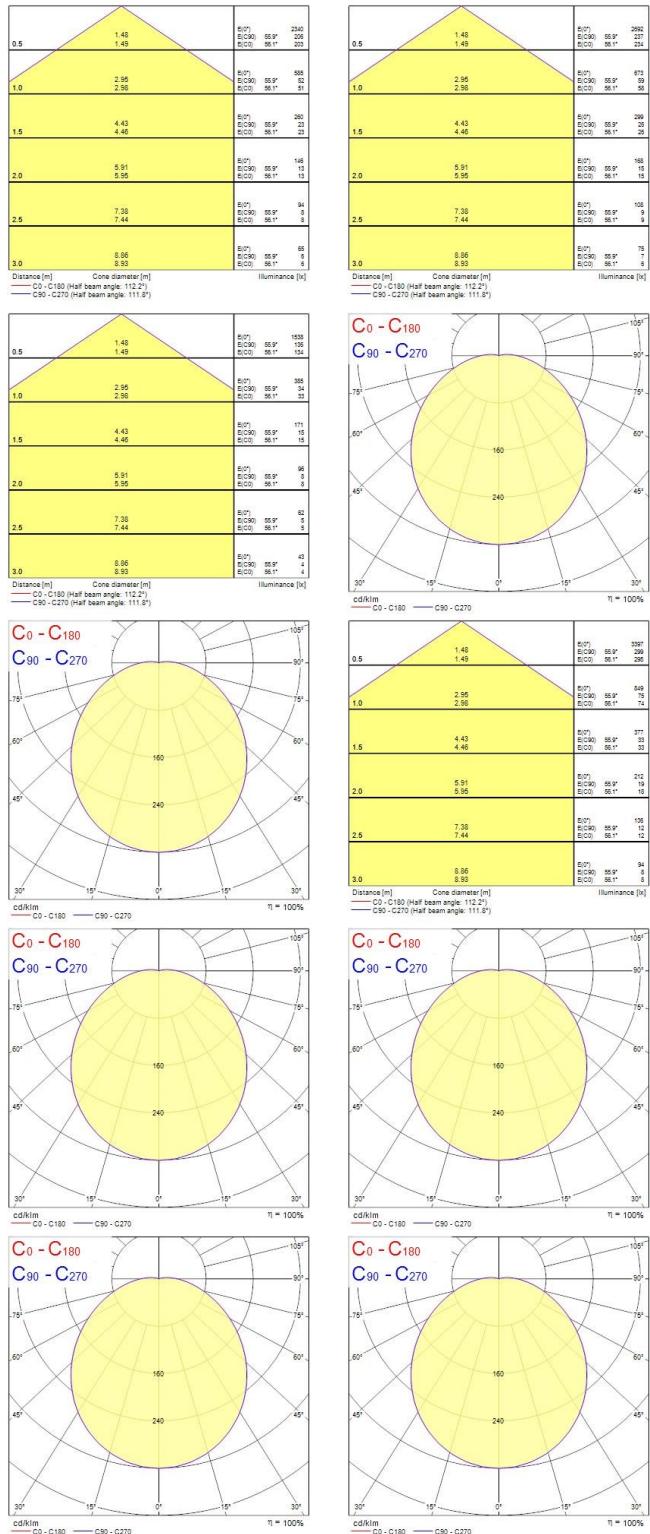

## Start Surface IP66 Ø350mm New

START Surface IP66 900-2950LM 840 IK10 BLK  
0049295

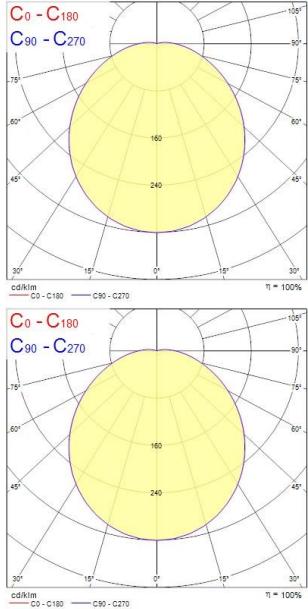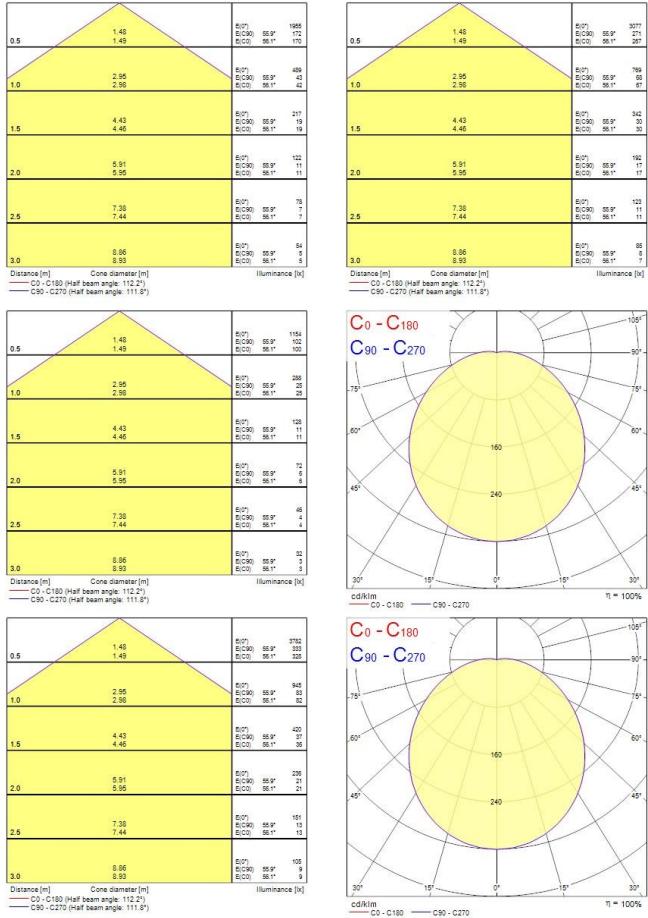

## TECHNICAL DRAWINGS

