


Data Sheet | Item Number: 855-501/400-1001

Plug-in current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1


<https://www.wago.com/855-501/400-1001>




Similar to illustration

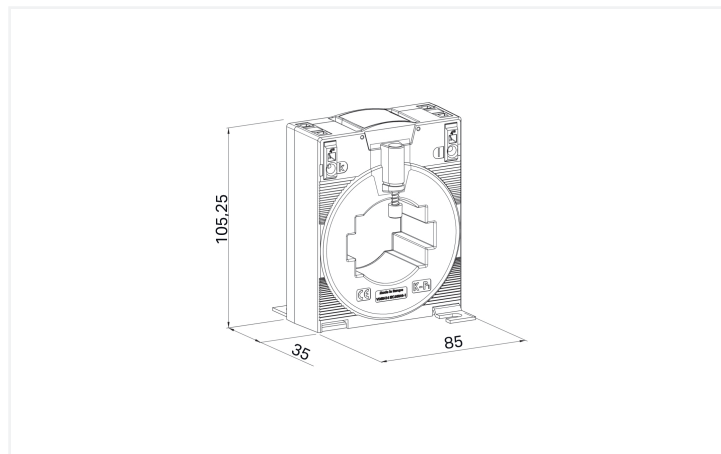

Dimensions in mm

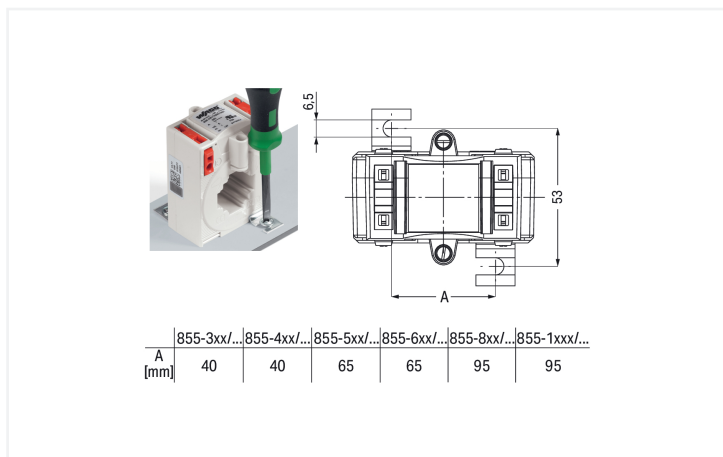

Dimensions in mm

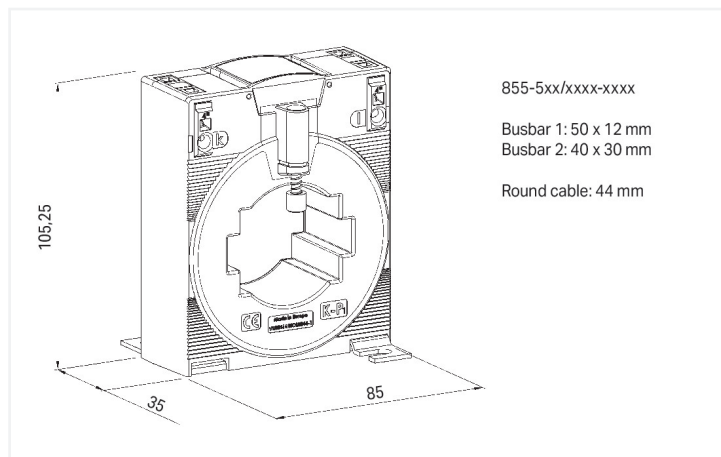

Short description:

WAGO's plug-in current transformers (855 Series) are inductive, single-conductor current transformers. Due to the measurement principle used, these current transformers are exclusively designed for AC network applications.

Features:

- Screwless CAGE CLAMP® connection technology
- Several mounting options available
- Vibration- and shock-resistant
- High mechanical retention forces
- High current-carrying capacity
- Continuous overload of 120 % the nominal primary current
- Low-voltage current transformer for operating voltages up to max. 1.2 kV
- For 690 V power networks
- UL recognized components



Technical data

Input		Input – current transformer	
Measured variable	Current	Rated continuous thermal current I_{cth}	$1.2 \times I_N$
		Rated short-time thermal current I_{th}	$60 \times I_N / 1 \text{ s}$ (max. 100 kA / 1 s)
		Overcurrent limiting factor	FS5 / FS10 (type dependent; see type plate inscription)
		Rated frequency	50 ... 60 Hz
		Primary rated current	400 A

Output – current transformer		Measurement Error	
Secondary rated current	1 A	Accuracy class	1
Rated power S_r	10 VA		

Safety and protection

Test voltage	6 kVAC; 50 Hz; 1 min
Highest voltage for equipment U_m	1.2 kV _{rms} AC

Connection Data

Feedthrough for measurement conductor	Ø 44 mm	Connection 1	
		Connection technology	CAGE CLAMP®
		Strip length	9 ... 10 mm / 0.35 ... 0.39 inches
		Solid conductor	0.08 ... 4 mm² / 28 ... 12 AWG
		Fine-stranded conductor	0.08 ... 4 mm² / 28 ... 12 AWG

Physical data

Width	85 mm / 3.346 inches
Height	105.25 mm / 4.144 inches
Depth	52 mm / 2.047 inches

Mechanical data

Mounting type	Closed current transformer Installation on mounting plate Installation on round cable
---------------	---

Material data

Insulation class	E
Fire load	0 MJ
Weight	380 g



Environmental requirements	
Ambient temperature (operation)	-5 ... +50 °C
Ambient temperature (storage)	-25 ... +70 °C
Operating altitude (max.)	1000 m

Standards and Specifications	
Conformity marking	CE
Standards/specifications	EN 61869-1 EN 61869-2 UL: E356480

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
Customs tariff number	85043129900

Product Classification	
UNSPSC	39121032
eCl@ss 10.0	27-21-09-02
eCl@ss 9.0	27-21-09-02
ETIM 9.0	EC002048
ETIM 10.0	EC002048
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates																				
General approvals		Declarations of conformity and manufacturer's declarations																		
 <table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EAC</td><td>TP TC 004/2011</td><td>EAC CoC 03082</td></tr><tr><td>GZO Almaty Standart</td><td></td><td></td></tr></table>		Approval	Standard	Certificate Name	EAC	TP TC 004/2011	EAC CoC 03082	GZO Almaty Standart			<table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr></table>	Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Approval	Standard	Certificate Name																		
EAC	TP TC 004/2011	EAC CoC 03082																		
GZO Almaty Standart																				
Approval	Standard	Certificate Name																		
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-																		
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-																		



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance	855-501/400-1001		

Documentation

Bid Text			
855-501/400-1001	19.02.2019	xml 4.92 KB	
855-501/400-1001	11.12.2017	doc 32.00 KB	

Instruction Leaflet		
Aufsteck-Stromwandler	pdf 1438.11 KB	

CAD/CAE-Data

CAD data	
2D/3D Models 855-501/400-1001	

CAE data	
EPLAN Data Portal 855-501/400-1001	
ZUKEN Portal 855-501/400-1001	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Current transformer terminal block



[Item No.: 2007-8876](#)
Compact terminal block; for 3-phase current transformer circuit; 6,00 mm²; multicoloured



[Item No.: 2007-8873](#)
Compact terminal block; for current and voltage transformers; 6,00 mm²; multicoloured



[Item No.: 2007-8874](#)
Compact terminal block; for current and voltage transformers; 6,00 mm²; multicoloured



[Item No.: 2007-8875](#)
Compact terminal block; for current transformer circuit; 6,00 mm²; multicoloured



[Item No.: 2007-8877](#)
Compact terminal block; for current transformer circuit; 6,00 mm²; multicoloured

1.1.2 Mounting adapter

1.1.2.1 Fast connection adapter



Item No.: 855-9910
Quick-mount kit

1.1.3 Signal conditioner

1.1.3.1 Current Signal Conditioner



Item No.: 857-551
Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width



Item No.: 857-550
Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width; 2,50 mm²

1.1.3.2 Power Measurement Module



Item No.: 2857-570/024-001
3-Phase Power Measurement Module; 3x277/480 V/1 A; Modbus RTU; Digital output; Configuration via software; Supply voltage: 24 VDC

1.1.4 Tool


1.1.4.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Installation




Installation on copper current bar



Installation on round cable



Installation on mounting plate



Installation via 855-9910 Quick-Mount Kit

Conductor termination



Conductor termination – screwdriver ac-
tuation perpendicular to conductor entry



Conductor termination – screwdriver ac-
tuation parallel to conductor entry