
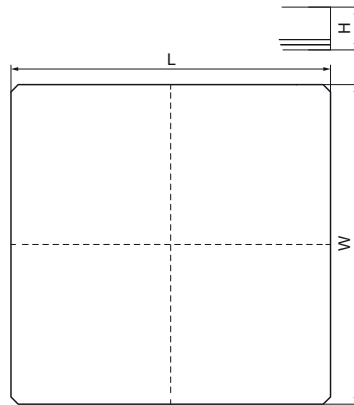


Walraven Yeti® Triplex Separation Layer

(10455)

separation layer between Yeti feet and PVC roofs



Features & benefits

- 3-layer release and protection layer for use between Walraven Yeti® and Ursus mounting foot and PVC roof
- size 350x350 by 1/4 pitch also suitable for Walraven Yeti® 130
- high coefficient of static friction (between 0.400 and 0.500 depending on roof pitch and dry / wet condition)
- use on both sides possible
- to protect PVC roofs against plasticizer migration
- two standard dimensions for Walraven Yeti® 480 and Walraven Yeti® 335, all other Walraven Yeti® and Ursus feet dimensions need to be adjusted by cropping
- material: HDPE film (white), aluminum foil, PET film (transparent)

Product Number	Total Height	Total Width	Total Length
<i>Reference Letter</i>	<i>H</i>	<i>W</i>	<i>L</i>
<i>Unit description</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
67685405	0.1	500	500
67685403	0.1	350	350