



Harmony XB5, Inbouwkkit voor Ø22mm keuzeschakelaar / verlichte drukknop, Zwart

ZB5AZ022

EAN Code: 3606485440231

Prijs: 8,25 EUR

Hoofd

range of product	Harmony XB5
product or component type	Inbouwkkit
categorie toebehoren	Montage en bevestiging toebehoren
compatibiliteit product	ZB5AD ZB5RTA ZB5AD.8 ZB5RZA0 ZB5AK ZB5AA.6 ZB5AD.9 ZB5AJ ZB5AW ZB5AH..3
bestemming toebehoren / onderdeel	Keuzeschakelaar met Hoge schuine rand en hoge beveiliging Verlichte drukknop met Hoge schuine rand en hoge beveiliging

Complementair

kleur	Zwart
IP beschermingsgraad	IP66 conform aan IEC 60529 (voorkant) IP69 conform aan IEC 60529 (voorkant) IP69K conform aan DIN 40050-9 (voorkant)
IK-beschermingsgraad	IK03 conforming to IEC 50102
bevestigingsdiameter	30,5 mm
Quantity per set	Set van 1

Verpakkingseenheid

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5,700 cm
Package 1 Width	5,200 cm
Package 1 Length	5,500 cm
Package 1 Weight	15,000 g
Unit Type of Package 2	S02
Number of Units in Package 2	80
Package 2 Height	15,000 cm
Package 2 Width	30,000 cm
Package 2 Length	40,000 cm

De weergegeven prijs is de adviesprijs in euro excl. BTW. Deze kan onderhevig zijn aan korting. Neem contact op met uw lokale distributeur of detailhandel voor de daadwerkelijke prijs

Disclaimer: Deze documentatie is niet bedoeld als vervanging voor en mag niet worden gebruikt voor het bepalen van de geschiktheid of betrouwbaarheid van deze producten voor specifieke gebruikerstoepassingen

Package 2 Weight	1,622 kg
------------------	----------



Environmental Data

Schneider Electric wil tegen 2050 de Net Zero-status hebben bereikt via partnerschappen in de toeleveringsketen, materialen met een lagere impact en circulariteit via onze doorlopende campagne "Use Better, Use Longer, Use Again" om de levensduur van producten en de recycleerbaarheid te verlengen.

[Uitleg van Environmental Data](#) >

[Hoe evalueren we de duurzaamheid van producten?](#) >

Use Better


Materialen en verpakking	
Pakket met gerecycleerd karton	Nee
Verpakkingen zonder kunststof	Nee
EU-richtlijn RoHS	In studie

Use Again

Herverpakken en herfabriceren	
Terugname	No

Dimensions Drawings


Dimensions with Flush Mounting Kit

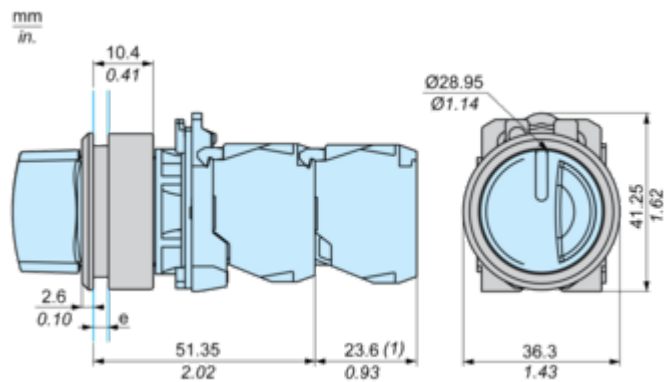

e : Clamping thickness : 1 to 3.5 mm / 0.04 to 0.14 in.
(1) Additional row of contacts or double contact


Mounting and Clearance

Panel Cut-Out and Mounting

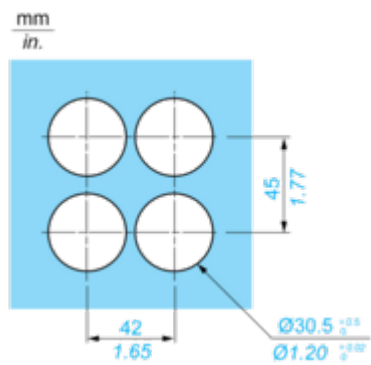

Technical Illustration

Dimensions

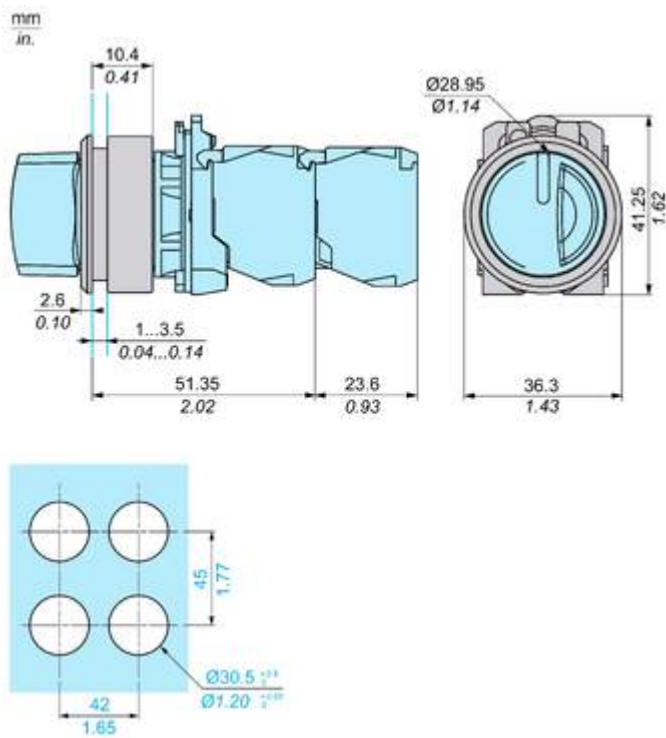

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB5



Quick and easy assembly and disassembly



Excellent mechanical connection with operator head



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Robustness to withstand harsh environments



Large set of accessories to customize your panels



Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XB5



Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XB5

Conformity with IEC,
UL, CSA, CCC EAC, and
JIS standards, as well as
CE marking and marine
approvals

Up to IP66, 67, 69,
69K, and type
4X protection ratings

High vibration resistance
with shake-proof
terminal screws



Operating temperature
from -40°C to 70°C

Shock protection level
up to IK06

Secure switching of
inductive or heavy DC
loads directly – 100 000
operations at 10A, 24V dc

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB5



Quick and easy assembly and disassembly



Excellent mechanical connection with operator head



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Robustness to withstand harsh environments



Large set of accessories to customize your panels



Image of product / Alternate images

Alternative



