

### Features

- Ceiling recessed luminaire, dimensions: 595 x 595 x 52mm, white (RAL9016) coated body, satin aluminium reflector (double symmetrical light distribution), for 2 x Helios LED T5 lamps (lamps not included), DALI dimmable LED driver, low LED flicker (+/-5%), 150mA drive current, push-in connector, IP20, IK07


### Product Overview

<b>Product name</b>	RANA HELIOS R 600 2L LOUV+PRI DALI
<b>Technology</b>	LED
<b>Cap/Base</b>	G5
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Light source included</b>	Fixture without Lightsource
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	3100
<b>Luminaire efficacy (lm/W)</b>	141
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	N/A
<b>CRI (Ra)</b>	85
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	46
<b>Glare control</b>	< 19


## RANA HELIOS R 600 2L LOUV+PRI DALI 0044990

Photobiological Risk Group	RG1
Total power consumption (W)	22
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288449906
Warranty	5 years
Dimming method	DALI

### Photometry

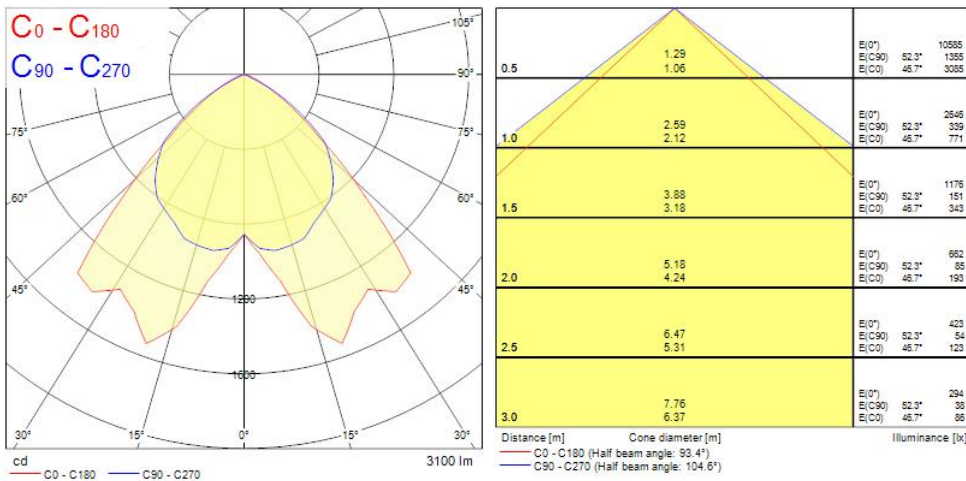

### Technical drawings

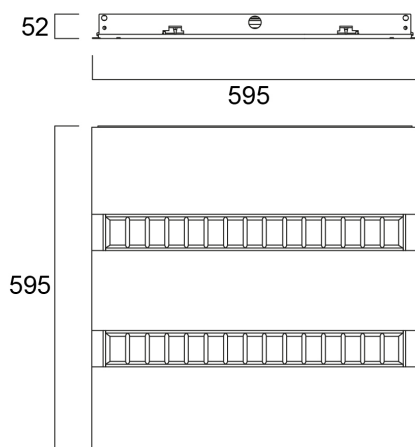

### Data table

#### GENERAL DATA

<b>Product name</b>	RANA HELIOS R 600 2L LOUV+PRI DALI
<b>Technology</b>	LED
<b>Cap/Base</b>	G5
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Education, Office
<b>Operating temperature range (°C)</b>	10°C...+25°C
<b>Performance ambient temperature Tq (°C)</b>	25
<b>ETIM Class</b>	EC002892
<b>Warranty</b>	5 years

#### OPTICAL DATA

<b>Fixture luminous flux (lm)</b>	3100
<b>Luminaire efficacy (lm/W)</b>	141
<b>Correlated colour temperature (k)</b>	4000

## RANA HELIOS R 600 2L LOUV+PRI DALI 0044990

Light colour	N/A
CRI (Ra)	85
Colour Variation Initial (SDCM)	3
Beam Angle (°)	46
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Light source included	Fixture without Lightsource
Total power consumption (W)	22
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.99
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	150
Inrush Current (A)	23
Inrush Duration ( $\mu$ s)	174
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	18
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	28
Max. products per 20A C Breaker	34
Max. products per 10A B Breaker	9
Max. products per 13A B Breaker	13
Max. products per 16A B Breaker	14
Max. products per 20A B Breaker	17
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

## RANA HELIOS R 600 2L LOUV+PRI DALI 0044990

### LIFETIME DATA

Lifespan L70 B50	75000
Lifespan L80 B50	50000

### PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	52
Weight (kg)	4.5

### PACKAGING

Product EAN number	5410288449906
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (inner)	05410288449906
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

### SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

**SYLVANIA**

RANA HELIOS R 600 2L LOUV+PRI DALI  
**0044990**

---



**Light your world**