
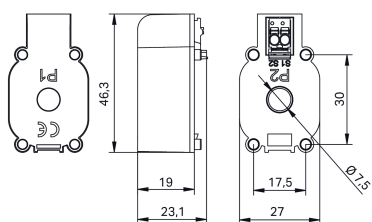



Data Sheet | Item Number: 855-2701/064-001

Plug-in current transformer; Primary rated current: 64 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1

<https://www.wago.com/855-2701/064-001>

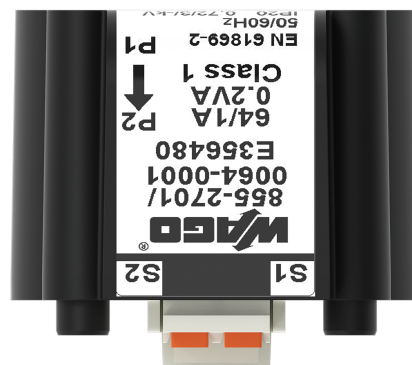

Dimensions in mm

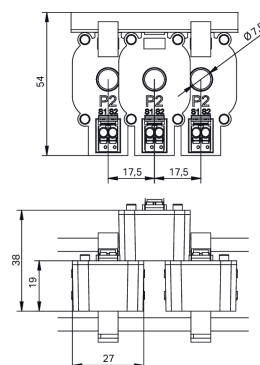

Dimensions in mm

Short description:

WAGO's plug-in current transformers (855 Series) are inductive, single-conductor current transformers. Due to the measurement principle used, these current transformers are exclusively designed for AC network applications.

Features:

- All-new design with *picoMAX*® connection technology
- Ready for space-restricted applications



- Simple assembly permits 17.5 mm phase spacing, allowing perfect adjustment to any circuit breaker.
- Easily mount on DIN-rail or panels via DIN-rail adapter (855-9927)
- Convert current from 64 A or 35 A to 1 A
- Accuracy class: 1

Technical data			
Input		Input – current transformer	
Measured variable	Current	Rated continuous thermal current I _{cth}	100 %
		Rated short-time thermal current I _{th}	60 x I _N / 1 s
		Rated surge current I _{dyn}	2.5 x I _{th}
		Rated frequency	50 ... 60 Hz
		Primary rated current	64 A
Output – current transformer		Measurement Error	
Secondary rated current	1 A	Accuracy class	1
Rated power S _r	0.2 VA		
Safety and protection			
Protection type	IP20		
Test voltage	3 kVAC; 50 Hz; 1 min		
Highest voltage for equipment U _m	720 V _{rms} AC		
Connection Data			
Feedthrough for measurement conductor	Ø 7.5 mm	Connection 1	
		Connection technology	Push-in CAGE CLAMP®
		WAGO connector	picoMAX® 3.5, 2091-1122
		Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
		Solid conductor	0.2 ... 1.5 mm² / 24 ... 14 AWG
		Fine-stranded conductor	0.2 ... 1.5 mm² / 24 ... 14 AWG
Physical data			
Width	27 mm / 1.063 inches		
Height	46 mm / 1.811 inches		
Depth	23 mm / 0.906 inches		
Mechanical data			
Mounting type	Closed current transformer Mounting on DIN-rail via DIN-rail adapter Installation on round cable		



Material data	
Insulation class	E
Housing material	PA 66
Fire load	0 MJ
Weight	44 g

Environmental requirements	
Ambient temperature (operation)	-10 ... +55 °C
Ambient temperature (storage)	-20 ... +70 °C
Relative humidity	5 ... 85 % (without condensation)
Operating altitude (max.)	2000 m

Standards and Specifications	
Conformity marking	CE
Standards/specifications	EN 61869-1 EN 61869-2 UL

Commercial data	
PU (SPU)	15 (1) pcs
Packaging type	Box
Country of origin	NL
Customs tariff number	85043129900

Product Classification	
UNSPSC	39121032
eCl@ss 10.0	27-21-09-02
eCl@ss 9.0	27-21-09-02
ETIM 9.0	EC002048
ETIM 10.0	EC002048
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
 			Approval	Standard	Certificate Name
Approval	Standard	Certificate Name	EU-Declaration of Confor-	-	-
EAC	TP TC 004/2011	EAC CoC 03082	mity		
GZO Almaty Standart			WAGO GmbH & Co. KG		
UL	IEEE C57.13	E356480			
Underwriters Laboratories Inc.					



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
855-2701/064-001

↓

Documentation

Bid Text

855-2701/064-001	19.02.2019	xml 5.16 KB	↓
855-2701/064-001	21.07.2015	doc 31.00 KB	↓

Instruction Leaflet

Aufsteck-Stromwandler mit picoMAX - Steckverbinder	pdf 320.75 KB	↓
--	------------------	---

CAD/CAE-Data

CAD data

2D/3D Models 855-2701/064-001	↓
----------------------------------	---

CAE data

EPLAN Data Portal 855-2701/064-001	↓
WSCAD Universe 855-2701/064-001	↓
ZUKEN Portal 855-2701/064-001	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Current transformer terminal block



Item No.: 2007-8876
Compact terminal block; for 3-phase current transformer circuit; 6,00 mm²; multicoloured



Item No.: 2007-8873
Compact terminal block; for current and voltage transformers; 6,00 mm²; multicoloured



Item No.: 2007-8874
Compact terminal block; for current and voltage transformers; 6,00 mm²; multicoloured



Item No.: 2007-8875
Compact terminal block; for current transformer circuit; 6,00 mm²; multicoloured



Item No.: 2007-8877
Compact terminal block; for current transformer circuit; 6,00 mm²; multicoloured

1.1.2 Mounting adapter

1.1.2.1 DIN-rail adapter



Item No.: 855-9927
Carrier rail adapter

1.1.3 Signal conditioner

1.1.3.1 Current Signal Conditioner



Item No.: 857-550
Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width; 2,50 mm²

1.1.3.2 Power Measurement Module



Item No.: 2857-570/024-001
3-Phase Power Measurement Module; 3x277/480 V/1 A; Modbus RTU; Digital output; Configuration via software; Supply voltage: 24 VDC

1.1.4 Tool


1.1.4.1 Operating tool



Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Installation Notes

Conductor termination



Push-in termination of solid conductors and fine-stranded conductors with ferrules



Universal connection for fine-stranded conductors

Installation



Just slide together.



To save space, mount directly above the circuit breaker.



Mounting on DIN-rail via 855-9927 DIN-Rail Adapter