


Resisto GRP

Resisto GRP 1200 IP66 5200lm 840
0010315



Product features

- Resisto GRP, integrated LED weatherproof luminaire, with smooth body finish optimized for LEDs with flat diffuser, easy to handle. Stainless steel diffuser clips and fixing brackets for surface mounting. The luminaire benefits from a water and dust resistant GRP body and PMMA diffuser. 5200lm; 37W; 140lm/W; 4000K; SDCM<4; non dimmable; CRI80; IP66; IK02; Class I; 72,000hrs (L80B20) lifespan; 1174mm x 90mm x 120mm; D-mark.

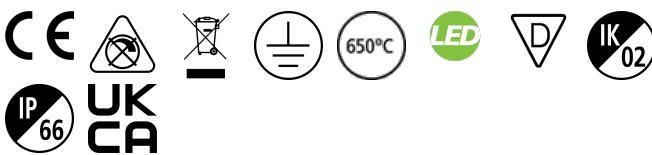

PRODUCT OVERVIEW

Product name	Resisto GRP 1200 IP66 5200lm 840
Technology	LED
Cap/Base	N/A
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357080
Warranty	5 years
Fixture luminous flux (lm)	5200
Luminaire efficacy (lm/W)	140
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM4
Beam Angle (°)	120
Photobiological Risk Group	RG1
Total power consumption (W)	37
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Housing colour	Grey
IP rating	IP66
IK rating	IK02
Product EAN number	5410288103150

PHOTOMETRY

Resisto GRP

Resisto GRP 1200 IP66 5200lm 840
0010315



TECHNICAL DRAWINGS

