


## Twofold faceplate, horizontal 71 mm centre distance, for one 45x45 function and a single switch function, Niko Toggle steel champagne coated

**166-57806**



The Niko Toggle twofold horizontally oriented faceplate clicks onto one 45 x 45 mm function and a single switch function that have been horizontally installed next to each other with a centre distance of 71 mm. The faceplate combines with any available Niko 45 x 45 mm function and a Niko Toggle single switch function. It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The upper frame is 2 mm thick and the lower frame 6 mm.

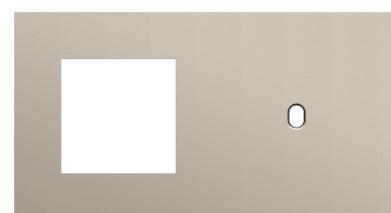

Niko recommends a design combination with a finishing set in the following colour: steel champagne coated for Niko Rocker and Niko Toggle finishing sets and champagne coated for other finishing sets.

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)
- Designed to fit any available 45 x 45 mm function

### Technical data

Twofold faceplate, horizontal 71 mm centre distance, for one 45x45 function and a single switch function, Niko Toggle steel champagne coated.

- Double faceplate for two switches.
- Colour faceplate: steel champagne coated
- Colour RAL (approximately): 080 70 10
- Colour NCS (approximately): NCS S 4005-Y20R
- Recommended colour central plate: steel champagne coated for Niko Rocker and Niko Toggle finishing sets and champagne coated for other finishing sets
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Surface treatment: coated
- Surface finishing: matt
- Coating upper frame: the upperframe is enamelled champagne
- Coating lower frame: enamelled champagne

- Frame thickness: The upper frame is 2 mm thick and the lower frame 6 mm.
- Recess for indication led:
  - the faceplate is fitted with a light guide
  - the light guide is made of a translucent plastic
  - the light guide transports the light from the optional LED to the lever
  - please note that the faceplate should not be mounted upside down to ensure that the optional LED fits nicely with the light guide
- Centre-to-centre distance: 71 mm
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP20D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 mm x 154 mm x 13 mm
- Dimensions visible (HxWxD): 83 mm x 154 mm
- Marking: EU