

Motion detector, 230 V, 26 m, IP55, for surface mounting

351-25050



4 year warranty



230 V



stand-alone



IP55



N.O. (max. 10 A)



5 lx – 2,000 lx



360°



ø 26 m from a height of 3 m



2 m – 8 m



surface-mounting






Detection range

H	A Across	B Towards
2 m	ø 20 m	ø 10 m
3 m	ø 26 m	ø 13 m
4 m	ø 28 m	ø 14 m
5 m	ø 30 m	ø 15 m
6 m	ø 30 m	ø 15 m
7 m	ø 30 m	ø 15 m
8 m	ø 30 m	ø 15 m

The motion detector with one channel for surface-mounting on ceilings is suitable for switching indoor lighting on and off. The detector is equipped with an integrated light sensor.

Colour: white

- Ideal for warehouses, underground garages, basements and stairwells
- With protection class IP55 also suitable for outdoor applications.
- Large connection space for mounting

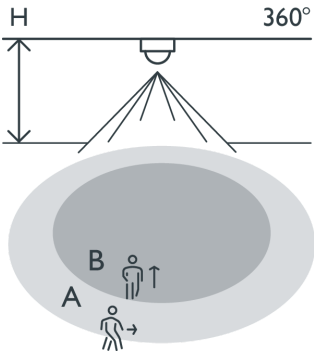


Technical features

Configuration	stand-alone
Input voltage	230 Vac
Detector output	230 V (ON/OFF)
Maximum current consumption	3.91 mA
Switch-off delay	pulse, 10 s – 20 min
Maximum power consumption	0.9 W
Maximum MCB rating	10 A
Detection angle	360 °
Detection range (PIR)	ø 26 m from a height of 3 m
Minimum ambient temperature	-20 °C
Maximum ambient temperature	+55 °C
Mounting method	surface mounting
Mounting height	2 m – 8 m
Colour	white
Colour RAL (approximately)	9010
Dimensions visible (HxWxD)	125 mm x 125 mm
Dimensions (HxWxD)	125 mm x 125 mm x 75 mm
Protection degree standalone	IP55
Impact resistance	IK02
Modification of settings	Potentiometers or IR remote control
Certificates marks	CE

Accessories

350-41936	Universal remote control for smartphone
351-25320	IR remote control
351-25310	IR remote control for users

Dimensions

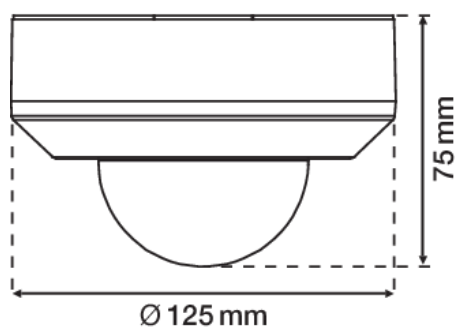

Wiring diagram

