


## Threefold faceplate, horizontal 71 mm centre distance, for a socket outlet, a double switch function and a socket outlet function, Niko Toggle steel champagne coated

166-57719



The Niko Toggle threefold horizontally oriented faceplate clicks onto a socket outlet, a double switch function and a socket outlet function that have been horizontally installed next to each other with a centre distance of 71 mm. The faceplate combines with any available Niko Rocker and Niko Toggle socket outlet finishing set and Niko Toggle for single switch functions. It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The upper frame is made of steel. The lower frame is made of white, champagne coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA). The upper frame is 2 mm thick and the lower frame 6 mm.

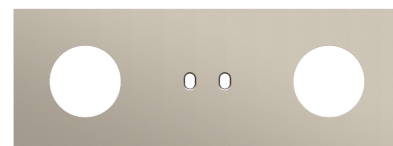

Niko recommends a design combination with a finishing set in the following colour: steel champagne coated for Niko Rocker and Niko Toggle finishing sets and champagne coated for other finishing sets.

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)
- Designed to fit the standard socket outlet base

### Technical data

Threefold faceplate, horizontal 71 mm centre distance, for a socket outlet, a double switch function and a socket outlet function, Niko Toggle steel champagne coated.

- Threefold faceplate for three switches.
- Colour faceplate: steel champagne coated
- Colour RAL (approximately): 080 70 10
- Colour NCS (approximately): NCS S 4005-Y20R
- Recommended colour central plate: steel champagne coated for Niko Rocker and Niko Toggle finishing sets and champagne coated for other finishing sets
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.

- Material finishing: The upperframe is made of steel. The lower frame is made of white, champagne coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA).
- Surface treatment: coated
- Surface finishing: matt
- Coating upper frame: the upperframe is enamelled champagne
- Coating lower frame: enamelled champagne
- Frame thickness: The upper frame is 2 mm thick and the lower frame 6 mm.
- Centre-to-centre distance: 71 mm
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP21D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 mm x 225 mm x 13 mm
- Dimensions visible (HxWxD): 83 mm x 225 mm
- Certification marks: CEBEC, NF
- Marking: EU