

27 808 980 Product version up to 6/3/2020



- COMPACT RAIN, max. flow rate 15 l/min (at 3 bar)
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- with anti-scale system

**Technical data:**

- rosette for shower holder 60 x 60mm
- rosette for wall elbow 60 x 60mm
- 1/2" wall elbow

**Notes:**

Intrinsic protection against back flow.

Recommended miscellaneous




**Concealed wall elbow -**

- min. recess depth 90 mm
- max. recess depth 163 mm


35 085 970 90

27 808 980 Product version up to 6/3/2020

mm [inches]

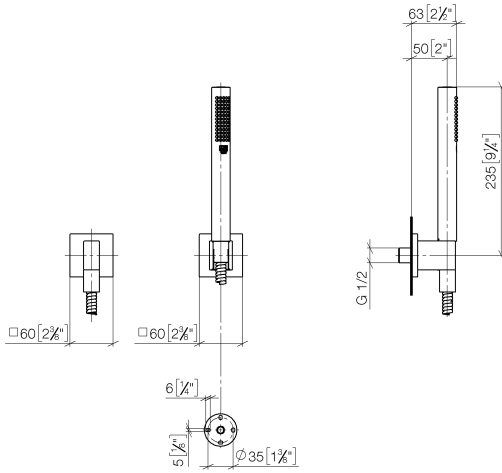

Flow rate chart

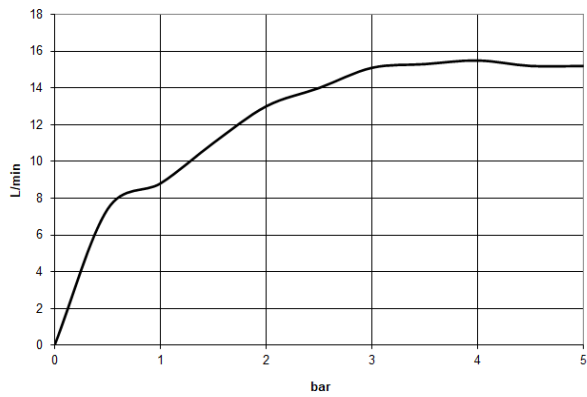

Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Hand shower set with individual rosettes - Platinum


SERIES SPECIFIC

27 808 980 Product version up to 6/3/2020

### Certificates and sustainability

LGA\_29

Belgaqua\_22\_280\_2 WRAS\_2209

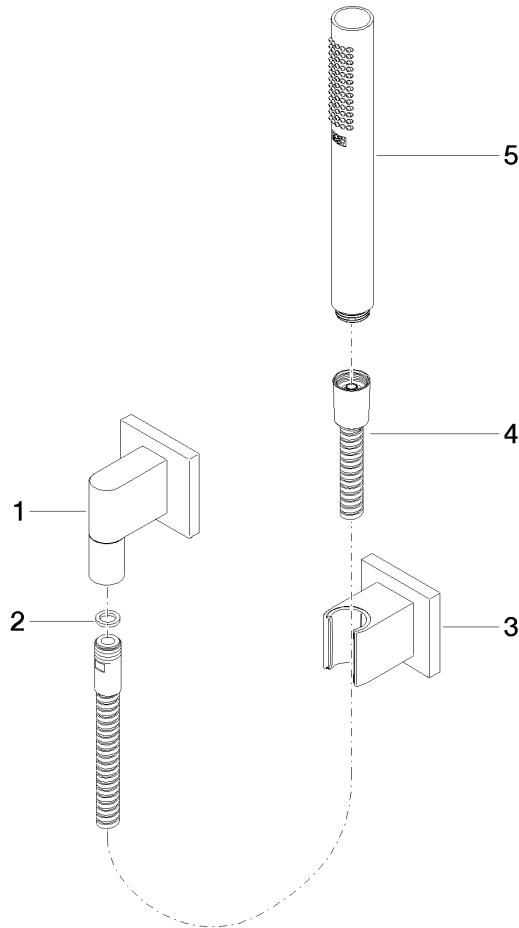

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 450 980-08	Wall elbow - Platinum	1.00	54
4	90 30 02 072 00-08	Metal shower hose 1/2" x 3/8" x 1250 mm - Platinum	1.00	54
3	28 050 980-08	Wall bracket - Platinum	1.00	54
2	90 14 20 026 00 90	Washer 14 x 8 x 2 mm Centellen WS 3820 -	1.00	14
5	90 12 11 140 40-08	Bar-type hand shower 15 l/min. - Platinum	1.00	-

Spare part can no longer be ordered, please order the replacement item