


Color: ■ pink

Similar to illustration

Dimensions in mm

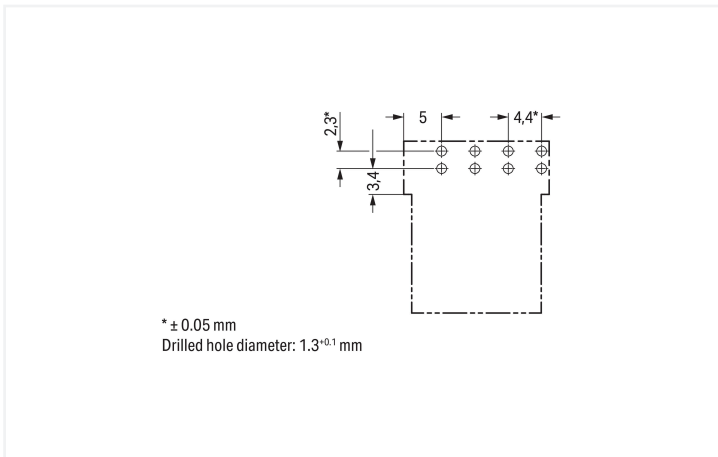

Dimensions in mm

#### Female connector/socket WINSTA® MINI with protection against mismatching

The WINSTA® MINI female connector/socket with protection against mismatching are compact but powerful PCB terminal blocks. They offer easy operation and the greatest flexibility for installation. The pluggable PCB connectors with spring pressure connection technology and Push-in CAGE CLAMP® technology from WAGO allow impact-resistant, maintenance-free, fast terminal connections. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. Solutions like the WINSTA® MINI pcb connectors with B coding are suitable for process control, such as for lighting or in data networks. WINSTA® MINI is our response to the trend toward miniaturisation. Our smallest pluggable connection system is very good for lights, for example, since due to LED technology, these offer significantly less space for the connection technology.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It offers error-free installation of cables and components, quickly and reliably. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with marking from WAGO.

- pcb connectors with protection against mismatching
- easy tool-free operation, a wide range of coding options
- with B coding for use in automation of processes, such as lighting technology
- rapid, structured electrical installation

## Notes

|           |   |
|-----------|---|
| Variants: | Other pole markings<br>Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . |
|-----------|---|

## Electrical data

| Ratings per                     | IEC/EN 60664-1 |     |    |
|---------------------------------|----------------|-----|----|
| Overvoltage category            | III            | III | II |
| Pollution degree                | 3              | 2   | 2  |
| Nominal voltage                 | 250 V          | -   | -  |
| Rated impulse withstand voltage | 4 kV           | -   | -  |
| Rated current                   | 16 A           | -   | -  |

| Ratings per IEC/EN – Notes |  |
|----------------------------|--|
| Rated current (note)       | 13 A for 3-pole load<br>10 A for 4-pole load |

| Approvals per | UL 1977 |
|---------------|---------|
| Rated voltage | 600 V   |
| Rated current | 12 A    |

| General information        |  |
|----------------------------|--|
| Note on contact resistance | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/socket |

## Connection Data

|                            |   |
|----------------------------|---|
| Total number of potentials | 4 |
|----------------------------|---|

| Connection 1 |   |
|--------------|---|
| Pole number  | 4 |

## Physical data

|                                      |                          |
|--------------------------------------|--------------------------|
| Pin spacing                          | 4.4 mm / 0.173 inches    |
| Width                                | 19.2 mm / 0.756 inches   |
| Height                               | 15.7 mm / 0.618 inches   |
| Height from the surface              | 12.2 mm / 0.48 inches    |
| Depth                                | 28.4 mm / 1.118 inches   |
| Solder pin length                    | 3.5 mm                   |
| Solder pin dimensions                | 1 x 0.8 mm               |
| Drilled hole diameter with tolerance | 1.3 <sup>(+0.1)</sup> mm |

## Mechanical data

|   |  |
|---|--|
| Use                                     | Control technology   |
| Coding                                  | B  |
| Variable coding                         | No   |
| Marking                                 | 1 2 3 4  |
| Potential marking                       | 1 2 3 4  |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)   |
| Retention force of a plug-in connection | Locked: > 80 N   |
| Unmating force of a plug-in connection  | Unlocked: approx. 20 ... 70 N (depending on pole number)   |
| Number of mating cycles                 | 200, without resistive load<br>100, with resistive load I <sub>N</sub> = 16 A, tested (1.5 mm <sup>2</sup> ) |
| Design                                  | angled   |

### Plug-in connection

|                                    |  |
|------------------------------------|--|
| Contact type (pluggable connector) | Female connector/socket  |
| Connector (connection type)        | for PCB  |
| Mismating protection               | Yes  |
| Note on mismating protection       | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole  |
| Mating direction to the PCB        | 0°   |
| Locking lever                      | Yes  |
| Locking of plug-in connection      | Locking lever  |
| Note on locking system             | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |

### PCB contact

|                                     |                            |
|-------------------------------------|----------------------------|
| PCB contact                         | THT                        |
| Solder pin arrangement              | 2 in-line solder pins/pole |
| Number of solder pins per potential | 2                          |

### Material data

|                                    |  |
|------------------------------------|--|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | pink   |
| Cover color                        | gray   |
| Material group                     | I  |
| Insulation material (main housing) | Polyamide (PA66)   |
| Flammability class per UL94        | V0   |
| Clamping spring material           | Chrome-nickel spring steel (CrNi)  |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin  |
| Fire load                          | 0.017 MJ   |
| Weight                             | 4.3 g  |

### Environmental requirements

|  |  |
|--|--|
| Processing temperature                   | -5 ... +40 °C                              |
| Continuous operating temperature         | -35 ... +85 °C                             |
| Note on continuous operating temperature | Insulating parts for temperatures ≤ 105 °C |

### Commercial data

|                       |               |
|-----------------------|---------------|
| PU (SPU)              | 50 pcs        |
| Packaging type        | Box           |
| Country of origin     | PL            |
| GTIN                  | 4050821696087 |
| Customs tariff number | 85366990990   |

### Product Classification

|             |                      |
|-------------|----------------------|
| UNSPSC      | 39121409             |
| eCl@ss 10.0 | 27-44-06-05          |
| eCl@ss 9.0  | 27-44-06-05          |
| ETIM 9.0    | EC002637             |
| ETIM 10.0   | EC002637             |
| ECCN        | NO US CLASSIFICATION |

### Environmental Product Compliance

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

### Approvals / Certificates

#### General approvals



| Approval                                   | Standard  | Certificate Name |
|--|-----------|------------------|
| CB<br>DEKRA Certification B.V.             | IEC 61984 | NL-64351         |
| CB<br>DEKRA Certification B.V.             | EN 61984  | 71-112993        |
| cURus<br>Underwriters Laboratories<br>Inc. | UL 1977   | E45171           |
| KEMA/KEUR<br>DEKRA Certification B.V.      | EN 60320  | 2148952.04       |

#### Declarations of conformity and manufacturer's declarations

| Approval  | Standard | Certificate Name |
|---|----------|------------------|
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                |

### Approvals for marine applications



| Approval  | Standard | Certificate Name  |
|---|----------|-------------------|
| DNV GL<br>Det Norske Veritas, Ger-<br>manischer Lloyd | -        | TAE00001Z6        |
| LR<br>Lloyds Register                                 | EN 61535 | LR23317167TA      |
| PRS<br>Polski Rejestr Statków                         | -        | TE/1096/880590/23 |

### Downloads

#### Environmental Product Compliance

##### Compliance Search

Environmental Product  
Compliance  
890-884/011-000



CAD/CAE-Data

CAD data

2D/3D Models  
890-884/011-000



CAE data

ZUKEN Portal  
890-884/011-000

