





### Features

- Excellent fragment retention in the event of breakage. The protective FEP coating meets the IEC60068-2-75 Pendulum Hammer test (5 Joule) and the 4m drop test, demonstrating excellent glass retention in the event of accidental lamp breakage. The 97% UV-A transmission of FEP maintains maximum insect attraction.

### Product Overview

Product name	F15W T8 BL 368 Toughcoat™
Technology	Special applications
Cap/Base	G13
Fixture rating	Enclosed
E-number FI	4940430
Wattage (W)	15.00
Product EAN number	5410288001241

### Technical drawings

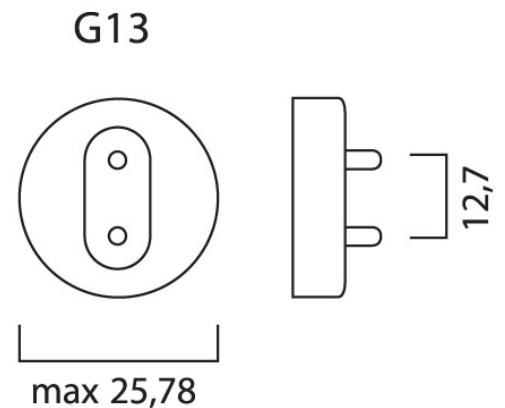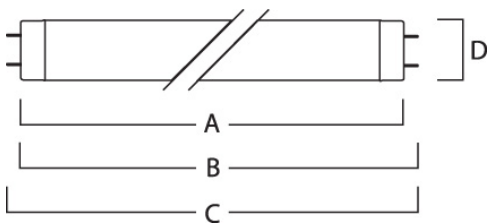

### Data table

### GENERAL DATA

Product name	F15W T8 BL 368 Toughcoat™
Technology	Special applications
Cap/Base	G13
Fixture rating	Enclosed
Operating temperature range (°C)	-15°C...+40°C
E-number FI	4940430

### OPTICAL DATA

Ambient temperature for maximum luminous flux (°C)	25
Adjustable chromaticity	N

### ELECTRICAL DATA

Wattage (W)	15.00
Current (A)	0.310
Primary Supply/Product voltage - min (V)	46.0
Control gear required	No
Drive current (mA)	310

### PHYSICAL DATA

Nominal Product Length (mm)	450.0
Nominal Product Diameter (mm)	26
Max. Length base to base (mm) - A	437.4
Length base to pin Min-Max (mm) - B	442.1-444.5
Max. Lamp Length (mm) - C/L	451.6
Max. Lamp Diameter (mm) - D	28.0
Weight (kg)	0.082

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288001241

## F15W T8 BL 368 Toughcoat™ 0000124

Packaging single width (cm)	2.9
Packaging single depth (cm)	2.8
DUN14 (outer)	15410288001248
Packaging outer length / height (cm)	48.0

### SAFETY DATA

Lamp mercury content (mg)	9.0
Optimal operating condition (°C)	-15-40
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	Yes
Intended purpose	Flykilling - Insect attraction
Dry applications use only	No
Suitable for household illumination	No
Safety message	Not suitable for household