



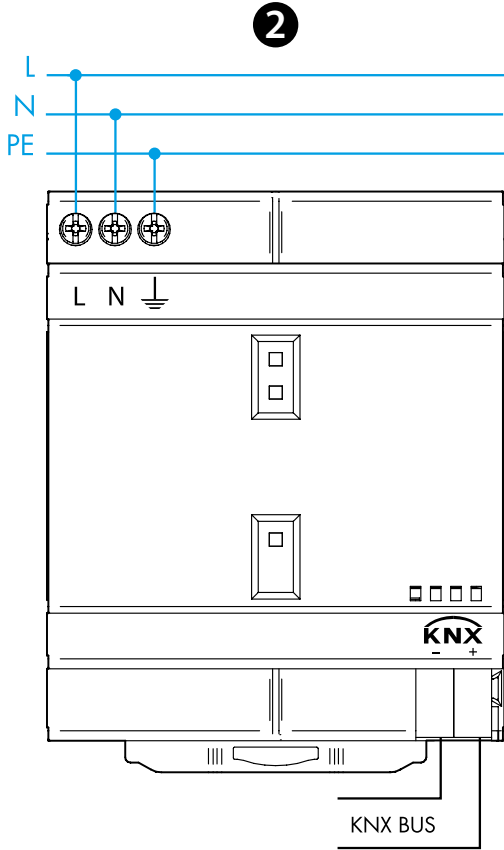

78.2K

78.2K.1.230.3000	
IN	230...240 V AC (50/60 Hz) U _{min} - U _{max} 185 - 260 V AC P (stand-by @230 V AC) 1.45 W
OUT	BUS KNX 30 V DC SELV (29...31 V DC) 640 mA
	(-5...+45)°C
IP20	

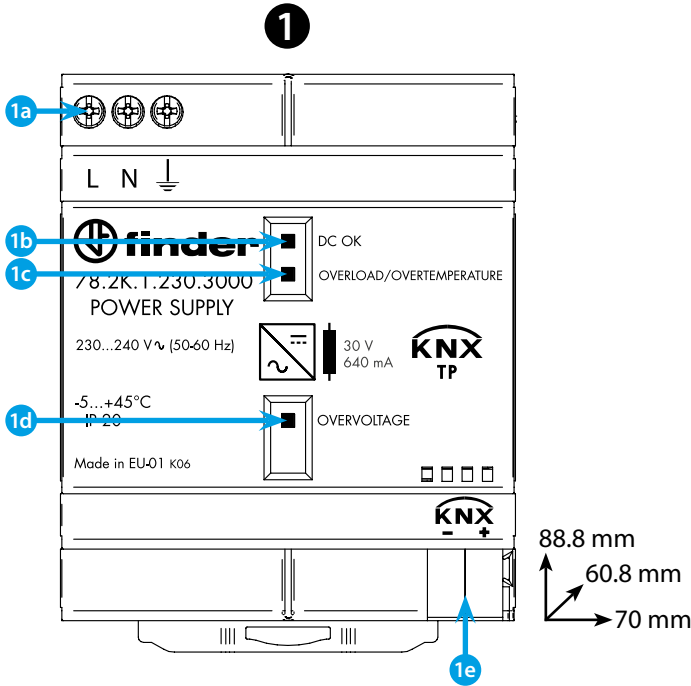

STATE		LED		OUT
CHECK START-UP	V _{OUT} OK	1b	1c OFF 1d OFF	ON
	V _{OUT} LOW < 29 V	1b	1c OFF 1d OFF	OFF
	V _{OUT} HIGH > 33 V	1b OFF 1c OFF 1d		OFF
NORMAL FUNCTION	V _{OUT} OK I _{OUT} ≥ 0.9 A	1b	1c	ON
	V _{OUT} < 29 V I _{OUT} ≥ 0.9 A	1b OFF 1c	1d OFF	ON
 ALARM CONDITION: T _{amb} > 45°C @ I _{nom} .	Pre-alarm: up to 60s	1b	1c	ON
	Latched alarm	1b OFF 1c	1d OFF	OFF

NEDERLANDS

78.2K.1.230.3000 KNX VOEDING 640 mA

- 1 FRONTAANZICHT
- 1a Voedingsspanning
 - 1b LED Groen (DC OK)
 - 1c LED Rood (overbelasting/oververhitting)
 - 1d LED Geel (overspanning)
 - 1e KNX-Bus aansluitklemmen

- 2 AANSLUITSCHEMA
- OPMERKING
- Dit product mag niet gebruikt worden in veiligheidstoepassingen
 - Omgevingsomstandigheden volgens EN 50491-2: Beschermd tegen het klimaat in ongecontroleerde omstandigheden, omgevingstemperatuur -5...+45°C
 - EN 63044-3/EN 50491
 - Minimale afstand tussen voedingen: 15 m
 - Verticale montage, op DIN-rail

