



### Features

- Sensor Dim LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, can be adjusted down to 1450lm by internal switch, 14W max. power consumption, 107lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), black housing, vandal resistant. Integrated Microwave occupancy sensor with daylight harvest, dimming and corridor function, supplied with anti-theft screws


### Product Overview

<b>Product name</b>	START SURFACE IP66 1500LM 840 MW SENS IK10 BLK
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting
<b>Environment</b>	Indoor, Outdoor
<b>Fixture luminous flux (lm)</b>	1500
<b>Luminaire efficacy (lm/W)</b>	107
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	6
<b>Glare control</b>	< 25
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	14
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	LED driver constant current
<b>Control gear mounting</b>	Integrated
<b>LED Flickering Rate</b>	Ultra low (5% or less)


## START SURFACE IP66 1500LM 840 MW SENS IK10 BLK 0049007

Housing colour	RAL9011
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490076
Warranty	5 years
Colour Code	840

### Photometry

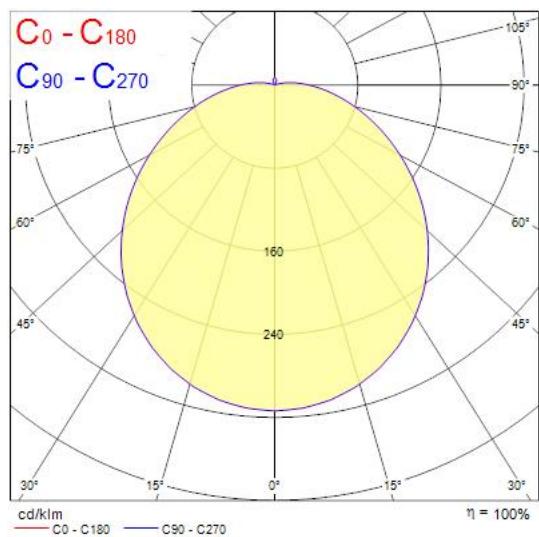

### Technical drawings

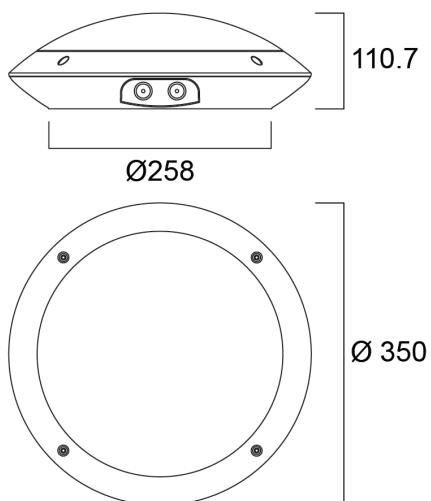

Light your world