



### Features

- LED exterior surface mounted luminaire, 350mm diameter, 1450lm as max. lumen output, 14W max. power consumption, 104lm/W efficacy, 3000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), black housing, vandal resistant. Integrated emergency, 3 hours, supplied with anti-theft screws

### Product Overview

<b>Product name</b>	START SURFACE IP66 1450LM 830 EM3 IK10 BLK
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting
<b>Environment</b>	Indoor, Outdoor
<b>Fixture luminous flux (lm)</b>	1450
<b>Luminaire efficacy (lm/W)</b>	85
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	6
<b>Glare control</b>	< 25
<b>Photobiological Risk Group</b>	RG0
<b>Luminous flux (emergency) (lm)</b>	124
<b>Total power consumption (W)</b>	17
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	LED driver constant current
<b>Control gear mounting</b>	Integrated
<b>LED Flickering Rate</b>	Ultra low (5% or less)
<b>Housing colour</b>	RAL9011

Light your world

## START SURFACE IP66 1450LM 830 EM3 IK10 BLK 0049010

IP rating

IP66

IK rating

IK10

Product EAN number

5410288490106


Warranty

5 years

Colour Code

830

### Photometry

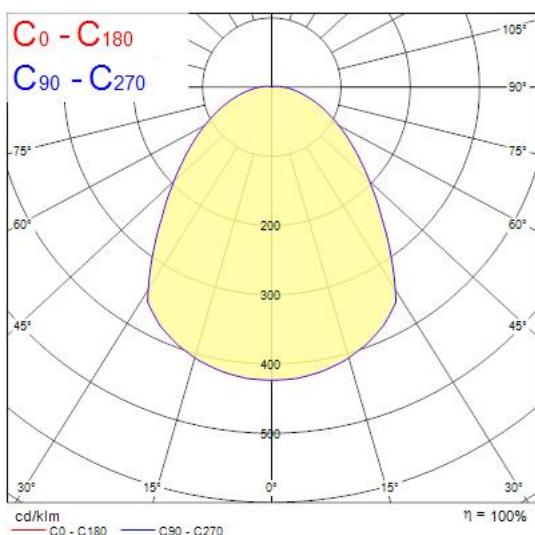

### Technical drawings

