



## Features

- Compact and elegant design Suitable replacement for halogen, incandescent and compact fluorescent lamps Instant light at the flick of a switch Uniform light distribution Good colour rendering (CRI 80) Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas Lower maintenance costs 15,000 hours average rated life



## Product Overview

Product name	ToLEDo GLS V7 1521LM 865 E27 SL
Technology	LED
Watt (Rated) (W)	13
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740987
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Wattage (W)	13
Power consumption (W)	13
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295954

## ToLEDo GLS V7 1521LM 865 E27 SL 0029595

Warranty	3 years
Useful luminous flux (#use)	1521

### Technical drawings

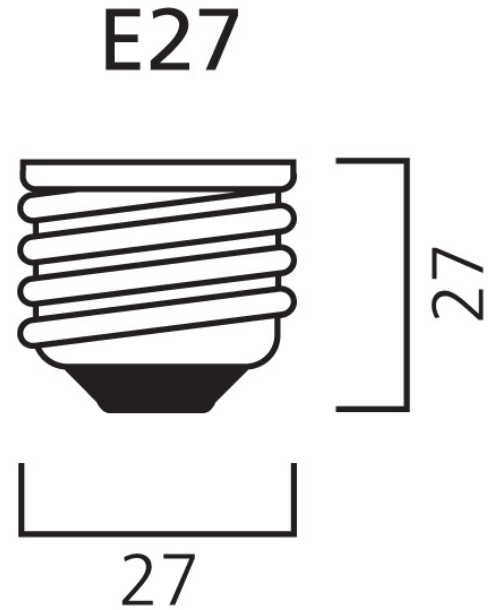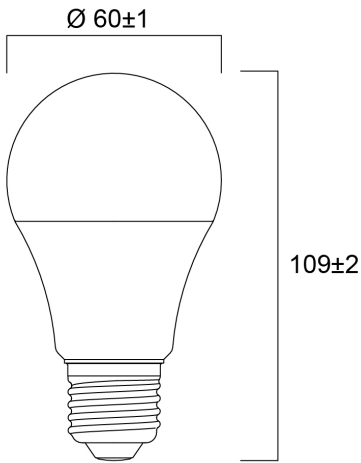

### Data table

#### GENERAL DATA

Product name	ToLEDo GLS V7 1521LM 865 E27 SL
Technology	LED
Watt (Rated) (W)	13
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959

ToLEDo GLS V7 1521LM 865 E27 SL  
0029595

E-number FI	4740987
Warranty	3 years

## OPTICAL DATA

Useful luminous flux (#use)	1521
Luminous flux (Rated) (lm)	1521
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

## ELECTRICAL DATA

Power consumption (W)	13
Wattage (W)	13
Equivalent watt (W)	100
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	6
Inrush Duration ( $\mu$ s)	350
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	27
Max. products per 16A B Breaker	13

## LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000

ToLEDo GLS V7 1521LM 865 E27 SL  
0029595

Average life (Rated) (h)	15000
--------------------------	-------

## PHYSICAL DATA

Nominal Product Length (mm)	120
Nominal Product Diameter (mm)	60
Weight (kg)	0.042

## PACKAGING

Product EAN number	5410288295954
Packaging single length / height (cm)	6.0
Packaging single width (cm)	6.0
Packaging single depth (cm)	12.2
DUN14 (inner)	15410288295951
Units per outer package	6
Packaging outer length / height (cm)	18.8
Packaging outer width (cm)	12.7
Packaging outer depth (cm)	13.0

## SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

# SYLVANIA

ToLEDo GLS V7 1521LM 865 E27 SL  
0029595

## Energy label



0029595



**13**  
kWh/1000h



2019/2015



0029595



**13**  
kWh/1000h



2019/2015