



Features

- LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, 14W max. power consumption, 107lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), black housing, vandal resistant. Integrated emergency, 3 hours, supplied with anti-theft screws

Product Overview

Product name	START SURFACE IP66 1500LM 840 EM3 IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	124
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9011

Light your world

START SURFACE IP66 1500LM 840 EM3 IK10 BLK 0049011

IP rating

IP66

IK rating

IK10

Product EAN number

5410288490113


Warranty

5 years

Colour Code

840

Photometry

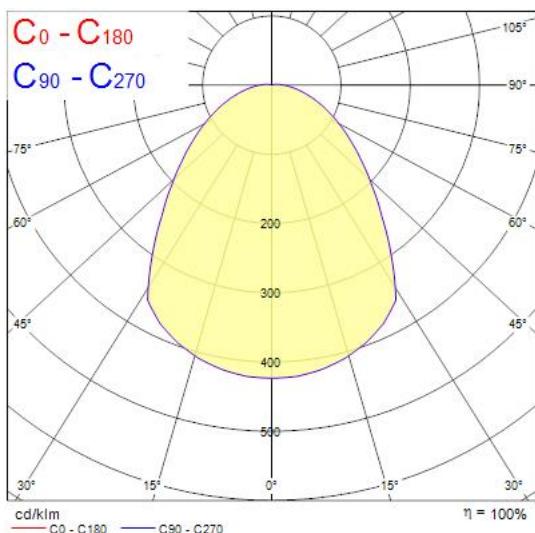

Technical drawings

