


Start Surface IP66 Ø350mm Sensor Dim  
START SURFACE IP66 1450LM 830 MW SENS EM3 IK10 WHT  
0049012

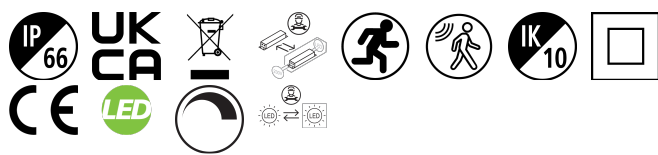

PRODUCT OVERVIEW








|                                 |                                                    |
|---------------------------------|----------------------------------------------------|
| Product name                    | START SURFACE IP66 1450LM 830 MW SENS EM3 IK10 WHT |
| Technology                      | LED                                                |
| Cap/Base                        | N/A                                                |
| Housing                         | PC Polycarbonate                                   |
| Mount                           | Ceiling surface mounting                           |
| Environment                     | Indoor, Outdoor                                    |
| Warranty                        | 5 years                                            |
| Fixture luminous flux (lm)      | 1450                                               |
| Luminaire efficacy (lm/W)       | 85                                                 |
| LOR (%)                         | 100                                                |
| Colour temperature (K)          | 3000                                               |
| Colour Code                     | 830                                                |
| Light colour                    | Warm White                                         |
| CRI (Ra)                        | 80                                                 |
| Colour Variation Initial (SDCM) | SDCM6                                              |
| Glare control                   | < 25                                               |
| Photobiological Risk Group      | RG0                                                |
| Luminous flux (emergency) (lm)  | 124                                                |
| Total power consumption (W)     | 17                                                 |
| Electrical protection           | Class II                                           |
| Control gear type               | LED driver constant current                        |
| Control gear mounting           | Integrated                                         |
| LED Flickering Rate             | Ultra low (5% or less)                             |
| Housing colour                  | RAL 9003 - Signal white                            |
| IP rating                       | IP66                                               |
| IK rating                       | IK10                                               |
| Product EAN number              | 5410288490120                                      |

PHOTOMETRY

## Start Surface IP66 Ø350mm Sensor Dim

*START SURFACE IP66 1450LM 830 MW SENS EM3 IK10 WHT*

0049012

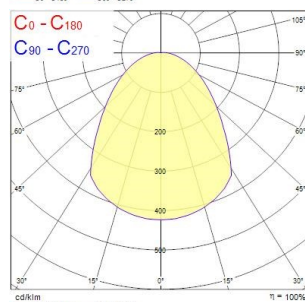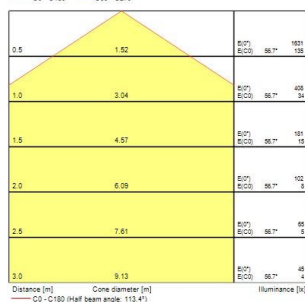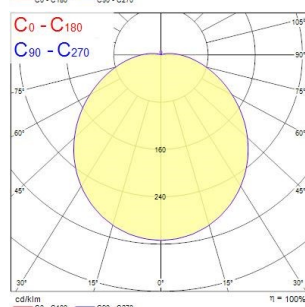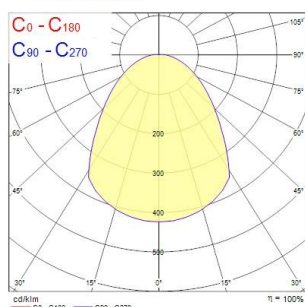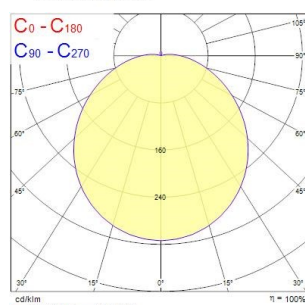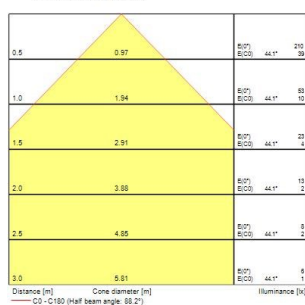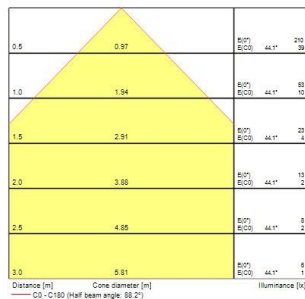

## TECHNICAL DRAWINGS

