



### Features

- Sensor Dim LED exterior surface mounted luminaire, 350mm diameter, 1450lm as max. lumen output, can be adjusted down to 1400lm by internal switch, 14W max. power consumption, 104lm/W efficacy, 3000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), white housing, vandal resistant. Integrated Microwave occupancy sensor with daylight harvest, dimming and corridor function. Integrated emergency, 3 hours, supplied with anti-theft screws

### Product Overview


Product name	START SURFACE IP66 1450LM 830 MW SENS EM3 IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
Fixture luminous flux (lm)	1450
Luminaire efficacy (lm/W)	85
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	124
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current

Light your world

## START SURFACE IP66 1450LM 830 MW SENS EM3 IK10 WHT 0049012

Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490120
Warranty	5 years
Colour Code	830

### Photometry

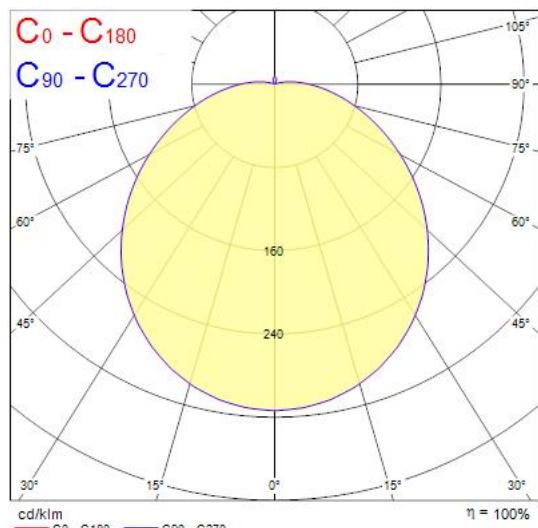

### Technical drawings

