


Equinox EQUINOX 165 2100 930 DALI BLACK 2060588




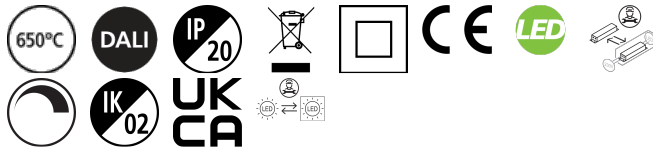


PRODUCT OVERVIEW

| | |
|---------------------------------|---------------------------------|
| Product name | EQUINOX 165 2100 930 DALI BLACK |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 2100 |
| Luminaire efficacy (lm/W) | 105 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 90 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Colour Consistency (SDCM) | 3 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 20 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Control gear mounting | Remote |
| Housing colour | RAL 9005 - Jet black |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768605880 |

PHOTOMETRY

Equinox EQUINOX 165 2100 930 DALI BLACK 2060588



TECHNICAL DRAWINGS

