

### Features

- A bright, all-around lighting solution for living rooms, wall lights, ceiling lights, compact and decorative luminaires Quick and easy replacement of compact fluorescent, halogen or incandescent lamp 15,000H average rated life 85% energy savings compared to incandescent Last 50% longer and consume 45% less energy compared to compact fluorescent integrated lamps Omni-directional light distribution Non-dimmable

### Product Overview

Product name	ToLEDo Stick V4 1521LM 827 E27 SL
Technology	LED
Watt (Rated) (W)	14.0
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740973
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Wattage (W)	14.0
Power consumption (W)	14
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295671

## ToLEDo Stick V4 1521LM 827 E27 SL 0029567



Warranty

3 years

Useful luminous flux (#use)

1521

### Technical drawings

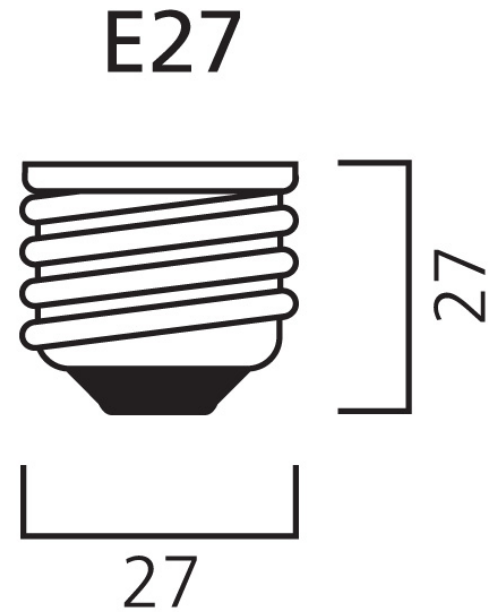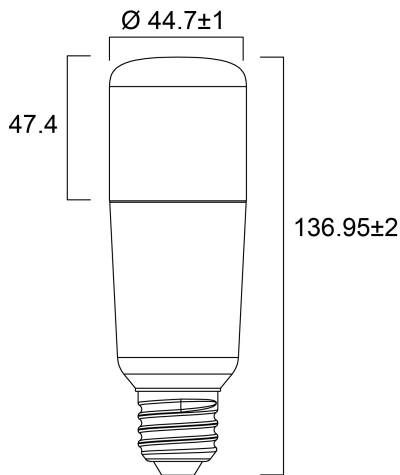

### Data table

#### GENERAL DATA

Product name	ToLEDo Stick V4 1521LM 827 E27 SL
Technology	LED
Watt (Rated) (W)	14.0
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959

## ToLEDo Stick V4 1521LM 827 E27 SL 0029567

E-number FI	4740973
Warranty	3 years

### OPTICAL DATA

Useful luminous flux (#use)	1521
Luminous flux (Rated) (lm)	1521
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

### ELECTRICAL DATA

Power consumption (W)	14
Wattage (W)	14.0
Equivalent watt (W)	100
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	1.1
Inrush Duration (µs)	120
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	90
Max. products per 20A C Breaker	90
Max. products per 10A B Breaker	90
Max. products per 13A B Breaker	90
Max. products per 16A B Breaker	90

### LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

### PHYSICAL DATA

Nominal Product Height (mm)	137
Nominal Product Diameter (mm)	45
Weight (kg)	0.072

### PACKAGING

Product EAN number	5410288295671
Packaging single length / height (cm)	5.3
Packaging single width (cm)	5.3
Packaging single depth (cm)	14.4
DUN14 (inner)	15410288295678
Units per outer package	6
Packaging outer length / height (cm)	16.4
Packaging outer width (cm)	11.1
Packaging outer depth (cm)	15.8

### SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

# SYLVANIA

ToLEDo Stick V4 1521LM 827 E27 SL  
0029567

## Energy label



0029567



**14**  
kWh/1000h



2019/2015



0029567



**14**  
kWh/1000h



2019/2015